

## 3560 - 100% Extension

All dimensions in mm.


System Load Capacity value refers to a pair of rails.

**Material:** Slide members and component parts - stainless SUS304. Balls - SUS304.

**Extension:** 100%




## General Data

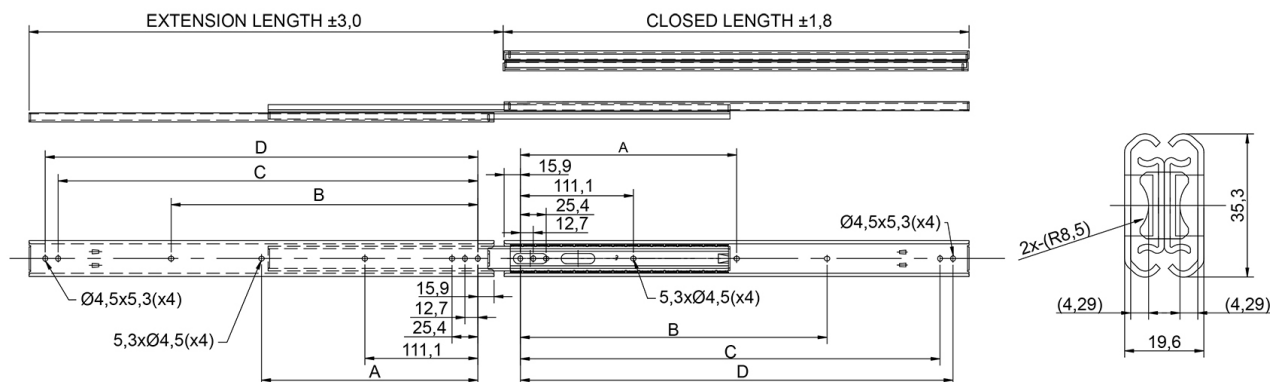

| Designation | Closed Length | Extension Length | System Load Capacity (N) |
|-------------|---------------|------------------|--------------------------|
| 3560-250    | 254           | 264              | 600                      |
| 3560-300    | 304.8         | 314.8            | 600                      |
| 3560-350    | 355.6         | 365.6            | 600                      |
| 3560-400    | 406.4         | 416.4            | 600                      |
| 3560-450    | 457.2         | 467.2            | 600                      |
| 3560-500    | 508           | 518              | 600                      |
| 3560-550    | 558.8         | 568.8            | 500                      |
| 3560-600    | 609.6         | 619.6            | 450                      |
| 3560-650    | 660.4         | 670.4            | 400                      |
| 3560-700    | 711.2         | 721.2            | 320                      |

## Dimensions

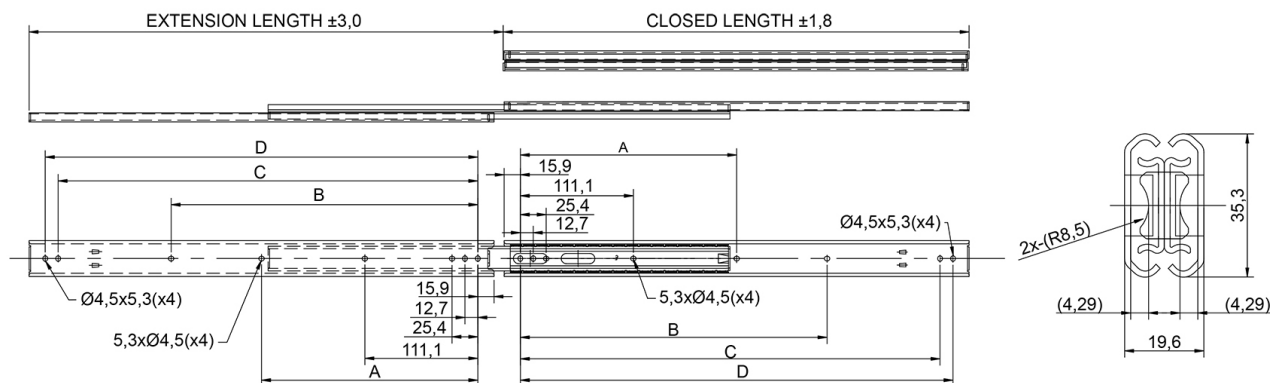

| Designation | A     | B     | C     | D     |
|-------------|-------|-------|-------|-------|
| 3560-250    | -     | -     | 209.5 | 222.2 |
| 3560-300    | -     | 149.2 | 260.3 | 273.0 |
| 3560-350    | -     | 200.0 | 311.1 | 323.8 |
| 3560-400    | -     | 250.8 | 361.9 | 374.6 |
| 3560-450    | 212.7 | 301.6 | 412.7 | 425.4 |
| 3560-500    | 238.1 | 352.4 | 463.5 | 476.2 |
| 3560-550    | 263.5 | 403.2 | 514.3 | 527.0 |
| 3560-600    | 288.9 | 454.0 | 565.1 | 577.8 |
| 3560-650    | 314.3 | 504.8 | 615.9 | 628.6 |
| 3560-700    | 339.7 | 555.6 | 666.7 | 679.4 |