

## Rail RMG

Standard rails with induction hardened raceways.

Very high load capacity, stiffness and precision.

Dimensions in mm. (According to the DIN 645/I standards.)


**Max. Operating Speed (m/s):** 3

**Max. Acceleration (m/s<sup>2</sup>):** 50

**Temperature range (°C):** -10 °C to +80

**Length (mm):** Up to 4000 mm


**Material:** Hardened steel

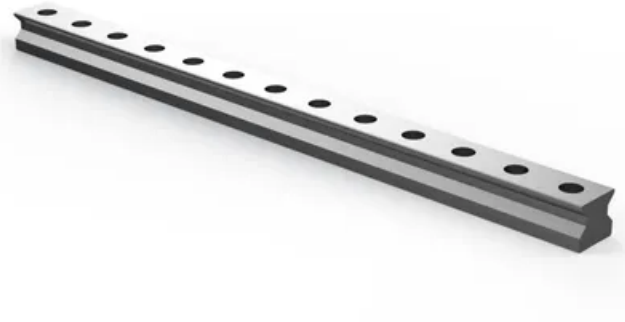

## General Data

Designation	Weight (kg/m)
RMG25	3.4
RMG35	6.5
RMG45	10.7
RMG55	15.2
RMG65	22.5

## Dimensions

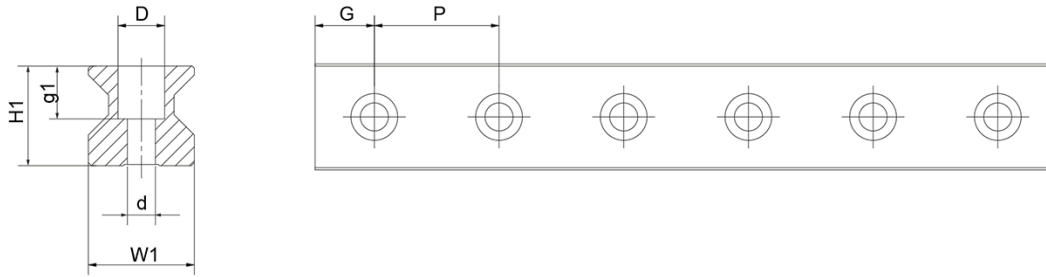

Designation	H1	W1	D x d x g1	Hole Pitch (P)
<b>RMG25</b>	24.35	23	11 x 7 x 11.5	30
<b>RMG35</b>	32	34	15 x 9 x 17	40
<b>RMG45</b>	39.85	45	20 x 14 x 19	52.5
<b>RMG55</b>	47.8	53	24 x 16 x 22	60
<b>RMG65</b>	55	63	26 x 18 x 26	75