

Slider NSW/NSA

Robust zinc plated steel slider with ball bearings, self-centering heads with wipers, longitudinal seals to protect the internal components and a top sealing strip to prevent accidental tampering of the fixed rollers. The slider body is accurately finished with matte longitudinal edge chamfer and a shining ground flat surface. It is available for all sizes, configurable with up to six rollers depending on the load requirement.



Standard sliders are supplied with rollers with 2Z steel disc seals. For dusty environment and splash-proof applications, 2RS rubber seal rollers are available.

All NSA-sliders, which are made for rail type K, have rollers with circular cross profile. The main load direction should always be on the largest number of the slider-wheels and those wheels should always run on the V-shaped raceway of the K-Rail. So for a typical slider with 3 wheels, the two outer wheels should carry the majority of the load and run in the V-shape and the third (middle) wheel should run on the flat raceway in the K-Rail.

All NSW/NSA sliders have wipers assembled and the wipers for K-Rails are adapted to work on the two different raceway shapes.

Dimensions in mm.

Material: DIN 11SMnPb28. Zinc-plated according to ISO 2081.

Max. Radial Load Capacity (N): 15,000 (per slider)

Temperature range (°C): -20 to +120

General Data

| Designation | Size | Max. Speed (m/s) | Max. Acceleration (m/s) | Roller type | Number of rollers |
|--------------|------|------------------|-------------------------|-------------|-------------------|
| NSW18-3-2RS | 18 | 3 | 10 | CPA18-CPN18 | 3 |
| NSW18-3-2Z | 18 | 3 | 10 | CPA18-CPN18 | 3 |
| NSW18-4A-2RS | 18 | 3 | 10 | CPA18 | 4 |
| NSW18-4A-2Z | 18 | 3 | 10 | CPA18 | 4 |
| NSW18-4B-2RS | 18 | 3 | 10 | CPA18 | 4 |
| NSW18-4B-2Z | 18 | 3 | 10 | CPA18 | 4 |
| NSW18-5-2RS | 18 | 3 | 10 | CPA18 | 5 |
| NSW18-5-2Z | 18 | 3 | 10 | CPA18 | 5 |
| NSW18-6A-2RS | 18 | 3 | 10 | CPA18 | 6 |
| NSW18-6A-2Z | 18 | 3 | 10 | CPA18 | 6 |
| NSW18-6B-2RS | 18 | 3 | 10 | CPA18 | 6 |
| NSW18-6B-2Z | 18 | 3 | 10 | CPA18 | 6 |
| NSW28-3-2RS | 28 | 5 | 15 | CPA28-CPN28 | 3 |
| NSW28-3-2Z | 28 | 5 | 15 | CPA28-CPN28 | 3 |
| NSW28-4A-2RS | 28 | 5 | 15 | CPA28 | 4 |
| NSW28-4A-2Z | 28 | 5 | 15 | CPA28 | 4 |
| NSW28-4B-2RS | 28 | 5 | 15 | CPA28 | 4 |
| NSW28-4B-2Z | 28 | 5 | 15 | CPA28 | 4 |
| NSW28-5-2RS | 28 | 5 | 15 | CPA28 | 5 |
| NSW28-5-2Z | 28 | 5 | 15 | CPA28 | 5 |
| NSW28-6A-2RS | 28 | 5 | 15 | CPA28 | 6 |
| NSW28-6A-2Z | 28 | 5 | 15 | CPA28 | 6 |
| NSW28-6B-2RS | 28 | 5 | 15 | CPA28 | 6 |
| NSW28-6B-2Z | 28 | 5 | 15 | CPA28 | 6 |
| NSW43-3-2RS | 43 | 7 | 15 | CPA43-CPN43 | 3 |
| NSW43-3-2Z | 43 | 7 | 15 | CPA43-CPN43 | 3 |
| NSW43-4A-2RS | 43 | 7 | 15 | CPA43 | 4 |
| NSW43-4A-2Z | 43 | 7 | 15 | CPA43 | 4 |
| NSW43-4B-2RS | 43 | 7 | 15 | CPA43 | 4 |
| NSW43-4B-2Z | 43 | 7 | 15 | CPA43 | 4 |

General Data

| Designation | Size | Max. Speed (m/s) | Max. Acceleration (m/s) | Roller type | Number of rollers |
|--------------|------|------------------|-------------------------|---------------|-------------------|
| NSW43-5-2RS | 43 | 7 | 15 | CPA43 | 5 |
| NSW43-5-2Z | 43 | 7 | 15 | CPA43 | 5 |
| NSW43-6A-2RS | 43 | 7 | 15 | CPA43 | 6 |
| NSW43-6A-2Z | 43 | 7 | 15 | CPA43 | 6 |
| NSW43-6B-2RS | 43 | 7 | 15 | CPA43 | 6 |
| NSW43-6B-2Z | 43 | 7 | 15 | CPA43 | 6 |
| NSA43-3-2RS | 43 | 7 | 15 | CRPA43-CRPN43 | 3 |
| NSA43-3-2Z | 43 | 7 | 15 | CRPA43-CRPN43 | 3 |
| NSA43-4A-2RS | 43 | 7 | 15 | CRPA43 | 4 |
| NSA43-4A-2Z | 43 | 7 | 15 | CRPA43 | 4 |
| NSA43-4B-2RS | 43 | 7 | 15 | CRPA43 | 4 |
| NSA43-4B-2Z | 43 | 7 | 15 | CRPA43 | 4 |
| NSA43-5-2RS | 43 | 7 | 15 | CRPA43 | 5 |
| NSA43-5-2Z | 43 | 7 | 15 | CRPA43 | 5 |
| NSA43-6A-2RS | 43 | 7 | 15 | CRPA43 | 6 |
| NSA43-6A-2Z | 43 | 7 | 15 | CRPA43 | 6 |
| NSA43-6B-2RS | 43 | 7 | 15 | CRPA43 | 6 |
| NSA43-6B-2Z | 43 | 7 | 15 | CRPA43 | 6 |
| NSW63-3-2ZR | 63 | 9 | 20 | CPA63 | 3 |
| NSW63-4A-2ZR | 63 | 9 | 20 | CPA63 | 4 |
| NSW63-4B-2ZR | 63 | 9 | 20 | CPA63 | 4 |
| NSW63-5-2ZR | 63 | 9 | 20 | CPA63 | 5 |
| NSW63-6A-2ZR | 63 | 9 | 20 | CPA63 | 6 |
| NSW63-6B-2ZR | 63 | 9 | 20 | CPA63 | 6 |
| NSA63-3-2ZR | 63 | 9 | 20 | CRPA63 | 3 |
| NSA63-4A-2ZR | 63 | 9 | 20 | CRPA63 | 4 |
| NSA63-4B-2ZR | 63 | 9 | 20 | CRPA63 | 4 |
| NSA63-5-2ZR | 63 | 9 | 20 | CRPA63 | 5 |
| NSA63-6A-2ZR | 63 | 9 | 20 | CRPA63 | 6 |
| NSA63-6B-2ZR | 63 | 9 | 20 | CRPA63 | 6 |

General Data

| Designation | Number of Fixing Holes |
|--------------|------------------------|
| NSW18-3-2RS | 4 |
| NSW18-3-2Z | 4 |
| NSW18-4A-2RS | 2 |
| NSW18-4A-2Z | 2 |
| NSW18-4B-2RS | 2 |
| NSW18-4B-2Z | 2 |
| NSW18-5-2RS | 4 |
| NSW18-5-2Z | 4 |
| NSW18-6A-2RS | 3 |
| NSW18-6A-2Z | 3 |
| NSW18-6B-2RS | 3 |
| NSW18-6B-2Z | 3 |
| NSW28-3-2RS | 4 |
| NSW28-3-2Z | 4 |
| NSW28-4A-2RS | 2 |
| NSW28-4A-2Z | 2 |
| NSW28-4B-2RS | 2 |
| NSW28-4B-2Z | 2 |
| NSW28-5-2RS | 4 |
| NSW28-5-2Z | 4 |
| NSW28-6A-2RS | 3 |
| NSW28-6A-2Z | 3 |
| NSW28-6B-2RS | 3 |
| NSW28-6B-2Z | 3 |
| NSW43-3-2RS | 4 |
| NSW43-3-2Z | 4 |
| NSW43-4A-2RS | 2 |
| NSW43-4A-2Z | 2 |
| NSW43-4B-2RS | 2 |
| NSW43-4B-2Z | 2 |
| NSW43-5-2RS | 4 |
| NSW43-5-2Z | 4 |


General Data

| Designation | Number of Fixing Holes |
|--------------|------------------------|
| NSW43-6A-2RS | 3 |
| NSW43-6A-2Z | 3 |
| NSW43-6B-2RS | 3 |
| NSW43-6B-2Z | 3 |
| NSA43-3-2RS | 4 |
| NSA43-3-2Z | 4 |
| NSA43-4A-2RS | 2 |
| NSA43-4A-2Z | 2 |
| NSA43-4B-2RS | 2 |
| NSA43-4B-2Z | 2 |
| NSA43-5-2RS | 4 |
| NSA43-5-2Z | 4 |
| NSA43-6A-2RS | 3 |
| NSA43-6A-2Z | 3 |
| NSA43-6B-2RS | 3 |
| NSA43-6B-2Z | 3 |
| NSW63-3-2ZR | 4+4 |
| NSW63-4A-2ZR | 5 |
| NSW63-4B-2ZR | 5 |
| NSW63-5-2ZR | 6 |
| NSW63-6A-2ZR | 7 |
| NSW63-6B-2ZR | 7 |
| NSA63-3-2ZR | 4+4 |
| NSA63-4A-2ZR | 5 |
| NSA63-4B-2ZR | 5 |
| NSA63-5-2ZR | 6 |
| NSA63-6A-2ZR | 7 |
| NSA63-6B-2ZR | 7 |


Dimensions

Size 18 - 28 - 43
(Use only the 2 fixing holes type 1 or 2)

NSW/NSA...3

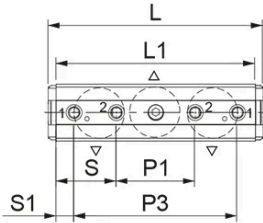


Size 63
(Use only the 4 fixing holes type 1 or 2)

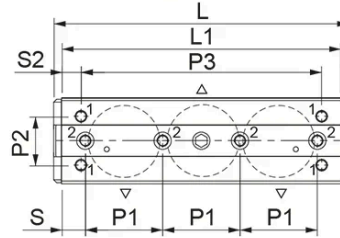


Configuration A


NSW/NSA...4


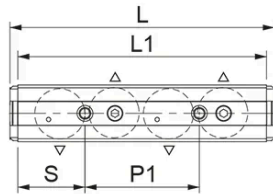


Configuration B

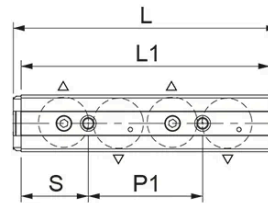


NSW/NSA...5

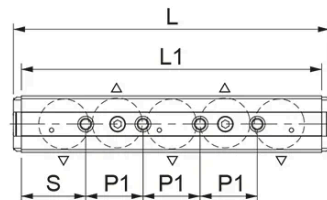


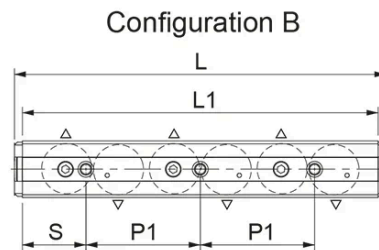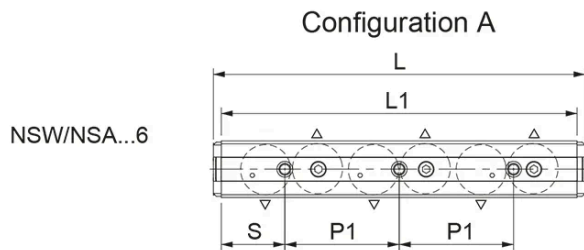

NSW-slider with prismatic rollers
for use in T- and U-rails

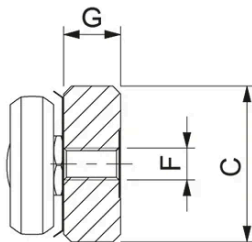

NSA-slider with crowned rollers
for use in K-rails

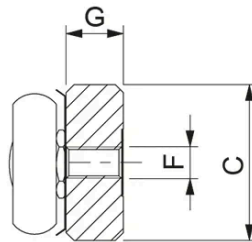

| Designation | L1 | L | C | G | F | P1 | P2 | P3 | S |
|--------------|-----|-----|------|------|----|----|----|-----|------|
| NSW18-3-2RS | 70 | 78 | 16 | 7.2 | M5 | 20 | - | 52 | 25 |
| NSW18-3-2Z | 70 | 78 | 16 | 7.2 | M5 | 20 | - | 52 | 25 |
| NSW18-4A-2RS | 92 | 100 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-4A-2Z | 92 | 100 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-4B-2RS | 92 | 100 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-4B-2Z | 92 | 100 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-5-2RS | 112 | 120 | 16 | 7.2 | M5 | 20 | - | - | 26 |
| NSW18-5-2Z | 112 | 120 | 16 | 7.2 | M5 | 20 | - | - | 26 |
| NSW18-6A-2RS | 132 | 140 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-6A-2Z | 132 | 140 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-6B-2RS | 132 | 140 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW18-6B-2Z | 132 | 140 | 16 | 7.2 | M5 | 40 | - | - | 26 |
| NSW28-3-2RS | 97 | 108 | 24.9 | 9.7 | M5 | 35 | - | 78 | 31 |
| NSW28-3-2Z | 97 | 108 | 24.9 | 9.7 | M5 | 35 | - | 78 | 31 |
| NSW28-4A-2RS | 117 | 128 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-4A-2Z | 117 | 128 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-4B-2RS | 117 | 128 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-4B-2Z | 117 | 128 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-5-2RS | 142 | 153 | 24.9 | 9.7 | M5 | 25 | - | - | 33.5 |
| NSW28-5-2Z | 142 | 153 | 24.9 | 9.7 | M5 | 25 | - | - | 33.5 |
| NSW28-6A-2RS | 167 | 178 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-6A-2Z | 167 | 178 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-6B-2RS | 167 | 178 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW28-6B-2Z | 167 | 178 | 24.9 | 9.7 | M5 | 50 | - | - | 33.5 |
| NSW43-3-2RS | 139 | 150 | 39.5 | 14.5 | M8 | 55 | - | 114 | 42 |
| NSW43-3-2Z | 139 | 150 | 39.5 | 14.5 | M8 | 55 | - | 114 | 42 |
| NSW43-4A-2RS | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSW43-4A-2Z | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSW43-4B-2RS | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSW43-4B-2Z | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |

Dimensions

| Designation | L1 | L | C | G | F | P1 | P2 | P3 | S |
|--------------|-----|-----|------|------|----|----|----|-----|------|
| NSW43-5-2RS | 210 | 221 | 39.5 | 14.5 | M8 | 40 | - | - | 45 |
| NSW43-5-2Z | 210 | 221 | 39.5 | 14.5 | M8 | 40 | - | - | 45 |
| NSW43-6A-2RS | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSW43-6A-2Z | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSW43-6B-2RS | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSW43-6B-2Z | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSA43-3-2RS | 139 | 150 | 39.5 | 14.5 | M8 | 55 | - | 114 | 42 |
| NSA43-3-2Z | 139 | 150 | 39.5 | 14.5 | M8 | 55 | - | 114 | 42 |
| NSA43-4A-2RS | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSA43-4A-2Z | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSA43-4B-2RS | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSA43-4B-2Z | 174 | 185 | 39.5 | 14.5 | M8 | 80 | - | - | 47 |
| NSA43-5-2RS | 210 | 221 | 39.5 | 14.5 | M8 | 40 | - | - | 45 |
| NSA43-5-2Z | 210 | 221 | 39.5 | 14.5 | M8 | 40 | - | - | 45 |
| NSA43-6A-2RS | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSA43-6A-2Z | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSA43-6B-2RS | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSA43-6B-2Z | 249 | 260 | 39.5 | 14.5 | M8 | 80 | - | - | 44.5 |
| NSW63-3-2ZR | 195 | 206 | 60 | 20.2 | M8 | 54 | 34 | 168 | 16.5 |
| NSW63-4A-2ZR | 250 | 261 | 60 | 20.2 | M8 | 54 | - | - | 17 |
| NSW63-4B-2ZR | 250 | 261 | 60 | 20.2 | M8 | 54 | - | - | 17 |
| NSW63-5-2ZR | 305 | 316 | 60 | 20.2 | M8 | 54 | - | - | 17.5 |
| NSW63-6A-2ZR | 360 | 371 | 60 | 20.2 | M8 | 54 | - | - | 18 |
| NSW63-6B-2ZR | 360 | 371 | 60 | 20.2 | M8 | 54 | - | - | 18 |
| NSA63-3-2ZR | 195 | 206 | 60 | 20.2 | M8 | 54 | 34 | 168 | 16.5 |
| NSA63-4A-2ZR | 250 | 261 | 60 | 20.2 | M8 | 54 | - | - | 17 |
| NSA63-4B-2ZR | 250 | 261 | 60 | 20.2 | M8 | 54 | - | - | 17 |
| NSA63-5-2ZR | 305 | 316 | 60 | 20.2 | M8 | 54 | - | - | 17.5 |
| NSA63-6A-2ZR | 360 | 371 | 60 | 20.2 | M8 | 54 | - | - | 18 |
| NSA63-6B-2ZR | 360 | 371 | 60 | 20.2 | M8 | 54 | - | - | 18 |


Dimensions

| Designation | S1 | S2 |
|--------------|------|----|
| NSW18-3-2RS | 9 | - |
| NSW18-3-2Z | 9 | - |
| NSW18-4A-2RS | - | - |
| NSW18-4A-2Z | - | - |
| NSW18-4B-2RS | - | - |
| NSW18-4B-2Z | - | - |
| NSW18-5-2RS | - | - |
| NSW18-5-2Z | - | - |
| NSW18-6A-2RS | - | - |
| NSW18-6A-2Z | - | - |
| NSW18-6B-2RS | - | - |
| NSW18-6B-2Z | - | - |
| NSW28-3-2RS | 9.5 | - |
| NSW28-3-2Z | 9.5 | - |
| NSW28-4A-2RS | - | - |
| NSW28-4A-2Z | - | - |
| NSW28-4B-2RS | - | - |
| NSW28-4B-2Z | - | - |
| NSW28-5-2RS | - | - |
| NSW28-5-2Z | - | - |
| NSW28-6A-2RS | - | - |
| NSW28-6A-2Z | - | - |
| NSW28-6B-2RS | - | - |
| NSW28-6B-2Z | - | - |
| NSW43-3-2RS | 12.5 | - |
| NSW43-3-2Z | 12.5 | - |
| NSW43-4A-2RS | - | - |
| NSW43-4A-2Z | - | - |
| NSW43-4B-2RS | - | - |
| NSW43-4B-2Z | - | - |
| NSW43-5-2RS | - | - |

Dimensions

| Designation | S1 | S2 |
|--------------|------|------|
| NSW43-5-2Z | - | - |
| NSW43-6A-2RS | - | - |
| NSW43-6A-2Z | - | - |
| NSW43-6B-2RS | - | - |
| NSW43-6B-2Z | - | - |
| NSA43-3-2RS | 12.5 | - |
| NSA43-3-2Z | 12.5 | - |
| NSA43-4A-2RS | - | - |
| NSA43-4A-2Z | - | - |
| NSA43-4B-2RS | - | - |
| NSA43-4B-2Z | - | - |
| NSA43-5-2RS | - | - |
| NSA43-5-2Z | - | - |
| NSA43-6A-2RS | - | - |
| NSA43-6A-2Z | - | - |
| NSA43-6B-2RS | - | - |
| NSA43-6B-2Z | - | - |
| NSW63-3-2ZR | - | 13.5 |
| NSW63-4A-2ZR | - | - |
| NSW63-4B-2ZR | - | - |
| NSW63-5-2ZR | - | - |
| NSW63-6A-2ZR | - | - |
| NSW63-6B-2ZR | - | - |
| NSA63-3-2ZR | - | 13.5 |
| NSA63-4A-2ZR | - | - |
| NSA63-4B-2ZR | - | - |
| NSA63-5-2ZR | - | - |
| NSA63-6A-2ZR | - | - |
| NSA63-6B-2ZR | - | - |

Load & Weight

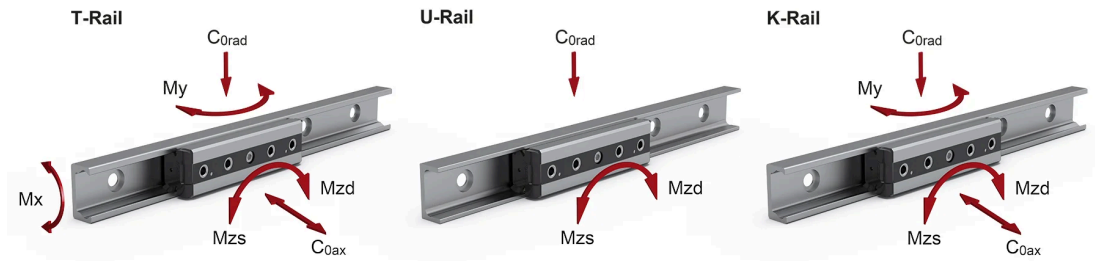

The load capacities in the following tables each apply for one slider. When using the slider in U-rails (floating bearing rails) the values are $C_{0ax} = 0$, $M_x = 0$ and $M_y = 0$. When using the sliders in K-rails (compensation rails) the value is: $M_x = 0$.

| Designation | C (N) | C0rad (N) | C0ax (N) | Mx (Nm) | My (Nm) |
|--------------|-------|-----------|----------|---------|---------|
| NSW18-3-2RS | 1530 | 820 | 260 | 1.5 | 4.7 |
| NSW18-3-2Z | 1530 | 820 | 260 | 1.5 | 4.7 |
| NSW18-4A-2RS | 1530 | 820 | 300 | 2.8 | 7 |
| NSW18-4A-2Z | 1530 | 820 | 300 | 2.8 | 7 |
| NSW18-4B-2RS | 1530 | 820 | 300 | 2.8 | 7 |
| NSW18-4B-2Z | 1530 | 820 | 300 | 2.8 | 7 |
| NSW18-5-2RS | 1830 | 975 | 360 | 2.8 | 9.4 |
| NSW18-5-2Z | 1830 | 975 | 360 | 2.8 | 9.4 |
| NSW18-6A-2RS | 1830 | 975 | 440 | 3.3 | 11.8 |
| NSW18-6A-2Z | 1830 | 975 | 440 | 3.3 | 11.8 |
| NSW18-6B-2RS | 1830 | 975 | 440 | 3.3 | 11.8 |
| NSW18-6B-2Z | 1830 | 975 | 440 | 3.3 | 11.8 |
| NSW28-3-2RS | 4260 | 2170 | 640 | 6.2 | 16 |
| NSW28-3-2Z | 4260 | 2170 | 640 | 6.2 | 16 |
| NSW28-4A-2RS | 4260 | 2170 | 750 | 11.5 | 21.7 |
| NSW28-4A-2Z | 4260 | 2170 | 750 | 11.5 | 21.7 |
| NSW28-4B-2RS | 4260 | 2170 | 750 | 11.5 | 21.7 |
| NSW28-4B-2Z | 4260 | 2170 | 750 | 11.5 | 21.7 |
| NSW28-5-2RS | 5065 | 2580 | 900 | 11.5 | 29 |
| NSW28-5-2Z | 5065 | 2580 | 900 | 11.5 | 29 |
| NSW28-6A-2RS | 5065 | 2580 | 1070 | 13.7 | 36.2 |
| NSW28-6A-2Z | 5065 | 2580 | 1070 | 13.7 | 36.2 |
| NSW28-6B-2RS | 5065 | 2580 | 1070 | 13.7 | 36.2 |
| NSW28-6B-2Z | 5065 | 2580 | 1070 | 13.7 | 36.2 |
| NSW43-3-2RS | 12280 | 5500 | 1570 | 23.6 | 60 |
| NSW43-3-2Z | 12280 | 5500 | 1570 | 23.6 | 60 |
| NSW43-4A-2RS | 12280 | 5500 | 1855 | 43.6 | 81.5 |
| NSW43-4A-2Z | 12280 | 5500 | 1855 | 43.6 | 81.5 |
| NSW43-4B-2RS | 12280 | 5500 | 1855 | 43.6 | 81.5 |
| NSW43-4B-2Z | 12280 | 5500 | 1855 | 43.6 | 81.5 |

Load & Weight

| Designation | C (N) | C0rad (N) | C0ax (N) | Mx (Nm) | My (Nm) |
|--------------|-------|-----------|----------|---------|---------|
| NSW43-5-2RS | 14675 | 6540 | 2215 | 43.6 | 108.6 |
| NSW43-5-2Z | 14675 | 6540 | 2215 | 43.6 | 108.6 |
| NSW43-6A-2RS | 14675 | 6540 | 2645 | 52 | 135.8 |
| NSW43-6A-2Z | 14675 | 6540 | 2645 | 52 | 135.8 |
| NSW43-6B-2RS | 14675 | 6540 | 2645 | 52 | 135.8 |
| NSW43-6B-2Z | 14675 | 6540 | 2645 | 52 | 135.8 |
| NSA43-3-2RS | 12280 | 5100 | 1320 | 0 | 50.4 |
| NSA43-3-2Z | 12280 | 5100 | 1320 | 0 | 50.4 |
| NSA43-4A-2RS | 12280 | 5100 | 1320 | 0 | 54.3 |
| NSA43-4A-2Z | 12280 | 5100 | 1320 | 0 | 54.3 |
| NSA43-4B-2RS | 12280 | 5100 | 1320 | 0 | 54.3 |
| NSA43-4B-2Z | 12280 | 5100 | 1320 | 0 | 54.3 |
| NSA43-5-2RS | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSA43-5-2Z | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSA43-6A-2RS | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSA43-6A-2Z | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSA43-6B-2RS | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSA43-6B-2Z | 14675 | 6065 | 1570 | 0 | 108.7 |
| NSW63-3-2ZR | 30750 | 12500 | 6000 | 125 | 271 |
| NSW63-4A-2ZR | 30750 | 12500 | 7200 | 250 | 413 |
| NSW63-4B-2ZR | 30750 | 12500 | 7200 | 250 | 413 |
| NSW63-5-2ZR | 36600 | 15000 | 8500 | 250 | 511 |
| NSW63-6A-2ZR | 36600 | 15000 | 10000 | 350 | 689 |
| NSW63-6B-2ZR | 36600 | 15000 | 10000 | 350 | 689 |
| NSA63-3-2ZR | 30750 | 11550 | 5045 | 0 | 235 |
| NSA63-4A-2ZR | 30750 | 11550 | 5045 | 0 | 294 |
| NSA63-4B-2ZR | 30750 | 11550 | 5045 | 0 | 294 |
| NSA63-5-2ZR | 36600 | 13745 | 6000 | 0 | 589 |
| NSA63-6A-2ZR | 36600 | 13745 | 6000 | 0 | 589 |
| NSA63-6B-2ZR | 36600 | 13745 | 6000 | 0 | 589 |

Load & Weight


| Designation | Mzd (Nm) | Mzs (Nm) | Weight (kg) |
|--------------|----------|----------|-------------|
| NSW18-3-2RS | 8.2 | 8.2 | 0.096 |
| NSW18-3-2Z | 8.2 | 8.2 | 0.096 |
| NSW18-4A-2RS | 8.2 | 24.7 | 0.096 |
| NSW18-4A-2Z | 8.2 | 24.7 | 0.096 |
| NSW18-4B-2RS | 24.7 | 8.2 | 0.11 |
| NSW18-4B-2Z | 24.7 | 8.2 | 0.11 |
| NSW18-5-2RS | 24.7 | 24.7 | 0.11 |
| NSW18-5-2Z | 24.7 | 24.7 | 0.11 |
| NSW18-6A-2RS | 24.7 | 41.1 | 0.138 |
| NSW18-6A-2Z | 24.7 | 41.1 | 0.138 |
| NSW18-6B-2RS | 41.1 | 24.7 | 0.138 |
| NSW18-6B-2Z | 41.1 | 24.7 | 0.138 |
| NSW28-3-2RS | 27.2 | 27.2 | 0.23 |
| NSW28-3-2Z | 27.2 | 27.2 | 0.23 |
| NSW28-4A-2RS | 27.2 | 81.7 | 0.29 |
| NSW28-4A-2Z | 27.2 | 81.7 | 0.29 |
| NSW28-4B-2RS | 81.7 | 27.2 | 0.29 |
| NSW28-4B-2Z | 81.7 | 27.2 | 0.29 |
| NSW28-5-2RS | 81.7 | 81.7 | 0.35 |
| NSW28-5-2Z | 81.7 | 81.7 | 0.35 |
| NSW28-6A-2RS | 81.7 | 136.1 | 0.42 |
| NSW28-6A-2Z | 81.7 | 136.1 | 0.42 |
| NSW28-6B-2RS | 136.1 | 81.7 | 0.42 |
| NSW28-6B-2Z | 136.1 | 81.7 | 0.42 |
| NSW43-3-2RS | 104.5 | 104.5 | 0.8 |
| NSW43-3-2Z | 104.5 | 104.5 | 0.8 |
| NSW43-4A-2RS | 104.5 | 313.5 | 1.02 |
| NSW43-4A-2Z | 104.5 | 313.5 | 1.02 |
| NSW43-4B-2RS | 313.5 | 104.5 | 1.02 |
| NSW43-4B-2Z | 313.5 | 104.5 | 1.02 |
| NSW43-5-2RS | 313.5 | 313.5 | 1.24 |
| NSW43-5-2Z | 313.5 | 313.5 | 1.24 |

Load & Weight


| Designation | Mzd (Nm) | Mzs (Nm) | Weight (kg) |
|--------------|----------|----------|-------------|
| NSW43-6A-2RS | 313.5 | 522.5 | 1.47 |
| NSW43-6A-2Z | 313.5 | 522.5 | 1.47 |
| NSW43-6B-2RS | 522.5 | 313.5 | 1.47 |
| NSW43-6B-2Z | 522.5 | 313.5 | 1.47 |
| NSA43-3-2RS | 96.9 | 96.9 | 0.8 |
| NSA43-3-2Z | 96.9 | 96.9 | 0.8 |
| NSA43-4A-2RS | 96.9 | 290.7 | 1.02 |
| NSA43-4A-2Z | 96.9 | 290.7 | 1.02 |
| NSA43-4B-2RS | 290.7 | 96.9 | 1.02 |
| NSA43-4B-2Z | 290.7 | 96.9 | 1.02 |
| NSA43-5-2RS | 290.7 | 290.7 | 1.24 |
| NSA43-5-2Z | 290.7 | 290.7 | 1.24 |
| NSA43-6A-2RS | 290.7 | 484.5 | 1.47 |
| NSA43-6A-2Z | 290.7 | 484.5 | 1.47 |
| NSA43-6B-2RS | 484.5 | 290.7 | 1.47 |
| NSA43-6B-2Z | 484.5 | 290.7 | 1.47 |
| NSW63-3-2ZR | 367 | 367 | 2.44 |
| NSW63-4A-2ZR | 367 | 1100 | 3.17 |
| NSW63-4B-2ZR | 1100 | 367 | 3.17 |
| NSW63-5-2ZR | 1100 | 1100 | 3.89 |
| NSW63-6A-2ZR | 1100 | 1830 | 4.60 |
| NSW63-6B-2ZR | 1830 | 1100 | 4.60 |
| NSA63-3-2ZR | 335 | 335 | 2.44 |
| NSA63-4A-2ZR | 335 | 935 | 3.17 |
| NSA63-4B-2ZR | 935 | 335 | 3.17 |
| NSA63-5-2ZR | 935 | 935 | 3.89 |
| NSA63-6A-2ZR | 935 | 1560 | 4.60 |
| NSA63-6B-2ZR | 1560 | 935 | 4.60 |

Rail/Slider Combination

T-rail with NSW slider

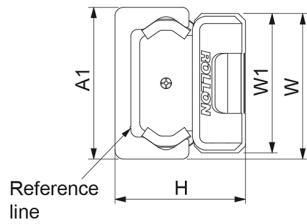


U-rail with NSW slider

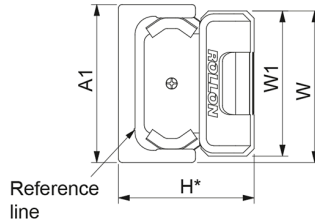

* Nom. value

K-rail with NSA slider

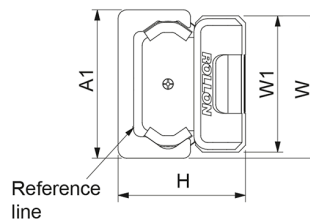

The K-rail enables the slider to twist around its longitudinal axis.

| Designation | A1 | H (Slider+T-rail) | H (Slider+U-rail) | H (Slider+K-rail) | W1 |
|--------------|------------------|-------------------|-------------------|-------------------|---------------|
| NSW18-3-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-3-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-4A-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-4A-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-4B-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-4B-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-5-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-5-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-6A-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-6A-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-6B-2RS | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW18-6B-2Z | 18 (+0.25/-0.10) | 16.5 (±0.15) | 16,5* | n/a | 16 (0/-0.2) |
| NSW28-3-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-3-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-4A-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-4A-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-4B-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-4B-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-5-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-5-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-6A-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-6A-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-6B-2RS | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW28-6B-2Z | 28 (+0.25/-0.10) | 23.9 (±0.15) | 23.9* | n/a | 24.9 (0/-0.2) |
| NSW43-3-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-3-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-4A-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-4A-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-4B-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-4B-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |

Rail/Slider Combination

| Designation | A1 | H (Slider+T-rail) | H (Slider+U-rail) | H (Slider+K-rail) | W1 |
|--------------|------------------|-------------------|-------------------|-------------------|---------------|
| NSW43-5-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-5-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-6A-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-6A-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-6B-2RS | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSW43-6B-2Z | 43 (+0.35/-0.10) | 37 (±0.15) | 37* | n/a | 39.5 (0/-0.2) |
| NSA43-3-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-3-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-4A-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-4A-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-4B-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-4B-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-5-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-5-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-6A-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-6A-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-6B-2RS | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSA43-6B-2Z | 43 (+0.35/-0.10) | n/a | n/a | 37 (±0.15) | 39.5 (0/-0.2) |
| NSW63-3-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSW63-4A-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSW63-4B-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSW63-5-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSW63-6A-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSW63-6B-2ZR | 63 (+0.35/-0.10) | 50.5 (±0.15) | 50.5* | n/a | 60 (0/-0.2) |
| NSA63-3-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |
| NSA63-4A-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |
| NSA63-4B-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |
| NSA63-5-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |
| NSA63-6A-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |
| NSA63-6B-2ZR | 63 (+0.35/-0.10) | n/a | n/a | 50.5 (±0.15) | 60 (0/-0.2) |

Rail/Slider Combination

| Designation | W |
|--------------|-------------------|
| NSW18-3-2RS | 17 (+0.1/-0.3) |
| NSW18-3-2Z | 17 (+0.1/-0.3) |
| NSW18-4A-2RS | 17 (+0.1/-0.3) |
| NSW18-4A-2Z | 17 (+0.1/-0.3) |
| NSW18-4B-2RS | 17 (+0.1/-0.3) |
| NSW18-4B-2Z | 17 (+0.1/-0.3) |
| NSW18-5-2RS | 17 (+0.1/-0.3) |
| NSW18-5-2Z | 17 (+0.1/-0.3) |
| NSW18-6A-2RS | 17 (+0.1/-0.3) |
| NSW18-6A-2Z | 17 (+0.1/-0.3) |
| NSW18-6B-2RS | 17 (+0.1/-0.3) |
| NSW18-6B-2Z | 17 (+0.1/-0.3) |
| NSW28-3-2RS | 26.45 (+0.1/-0.3) |
| NSW28-3-2Z | 26.45 (+0.1/-0.3) |
| NSW28-4A-2RS | 26.45 (+0.1/-0.3) |
| NSW28-4A-2Z | 26.45 (+0.1/-0.3) |
| NSW28-4B-2RS | 26.45 (+0.1/-0.3) |
| NSW28-4B-2Z | 26.45 (+0.1/-0.3) |
| NSW28-5-2RS | 26.45 (+0.1/-0.3) |
| NSW28-5-2Z | 26.45 (+0.1/-0.3) |
| NSW28-6A-2RS | 26.45 (+0.1/-0.3) |
| NSW28-6A-2Z | 26.45 (+0.1/-0.3) |
| NSW28-6B-2RS | 26.45 (+0.1/-0.3) |
| NSW28-6B-2Z | 26.45 (+0.1/-0.3) |
| NSW43-3-2RS | 41.25 (+0.2/-0.4) |
| NSW43-3-2Z | 41.25 (+0.2/-0.4) |
| NSW43-4A-2RS | 41.25 (+0.2/-0.4) |
| NSW43-4A-2Z | 41.25 (+0.2/-0.4) |
| NSW43-4B-2RS | 41.25 (+0.2/-0.4) |
| NSW43-4B-2Z | 41.25 (+0.2/-0.4) |
| NSW43-5-2RS | 41.25 (+0.2/-0.4) |
| NSW43-5-2Z | 41.25 (+0.2/-0.4) |

Rail/Slider Combination

| Designation | W |
|--------------|-------------------|
| NSW43-6A-2RS | 41.25 (+0.2/-0.4) |
| NSW43-6A-2Z | 41.25 (+0.2/-0.4) |
| NSW43-6B-2RS | 41.25 (+0.2/-0.4) |
| NSW43-6B-2Z | 41.25 (+0.2/-0.4) |
| NSA43-3-2RS | 41.25 (+0.2/-0.4) |
| NSA43-3-2Z | 41.25 (+0.2/-0.4) |
| NSA43-4A-2RS | 41.25 (+0.2/-0.4) |
| NSA43-4A-2Z | 41.25 (+0.2/-0.4) |
| NSA43-4B-2RS | 41.25 (+0.2/-0.4) |
| NSA43-4B-2Z | 41.25 (+0.2/-0.4) |
| NSA43-5-2RS | 41.25 (+0.2/-0.4) |
| NSA43-5-2Z | 41.25 (+0.2/-0.4) |
| NSA43-6A-2RS | 41.25 (+0.2/-0.4) |
| NSA43-6A-2Z | 41.25 (+0.2/-0.4) |
| NSA43-6B-2RS | 41.25 (+0.2/-0.4) |
| NSA43-6B-2Z | 41.25 (+0.2/-0.4) |
| NSW63-3-2ZR | 61.5 (+0.2/-0.4) |
| NSW63-4A-2ZR | 61.5 (+0.2/-0.4) |
| NSW63-4B-2ZR | 61.5 (+0.2/-0.4) |
| NSW63-5-2ZR | 61.5 (+0.2/-0.4) |
| NSW63-6A-2ZR | 61.5 (+0.2/-0.4) |
| NSW63-6B-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-3-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-4A-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-4B-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-5-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-6A-2ZR | 61.5 (+0.2/-0.4) |
| NSA63-6B-2ZR | 61.5 (+0.2/-0.4) |