

## Couplings

For Mini Linear Units MGBS & MGTB.

Dimensions in mm.




## General Data

Designation	Compatible with	Rated Torque (Nm)	Max. Torque (Nm)	Tightening Torque of the Clamping Screw (Nm)	Moment of inertia per hub (10 <sup>-3</sup> kg m <sup>2</sup> )
EKL 2	VK 32	2	4	0.6	0.003
EKL 5	VK 45	9	18	2	0.02
EKL 10	VK 60	12.5	25	4	0.03

Designation	Weight (kg)	Speed standard (min <sup>-1</sup> )
EKL 2	0.008	15000
EKL 5	0.02	15000
EKL 10	0.05	13000

## Dimensions

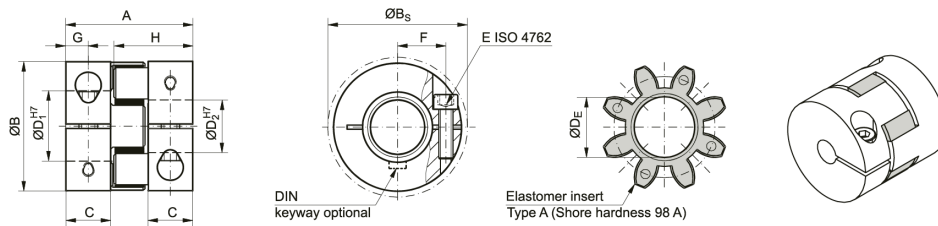

Designation	A	B	BS	C	D1	D2	DE	E	F
<b>EKL 2</b>	20	16	17	6	3	8	6.2	M2	5.5
<b>EKL 5</b>	26	25	25	8	4	12.7	10.2	M3	8
<b>EKL 10</b>	32	32	32	10.3	4	16	14.2	M4	10.5

Designation	G	H	Permissible bore diameters
<b>EKL 2</b>	3	12	3 / 4 / 5 / 6.35 / 8
<b>EKL 5</b>	4	16.7	4 / 5 / 6.35 / 8 / 10 / 12.7
<b>EKL 10</b>	5	20.7	4 / 5 / 6.35 / 8 / 10 / 12.7 / 14 / 16