

PSE 33 - Shaft 14 mm hollow

- Absolute measuring system
- Position control for direct connection to a control module
- Space-saving, compact design
- Galvanically separated supply voltages between control and motor and bus
- Durable EC-motor
- Extremely accurate positioning due to measurement of the position at the output side
- Bus interfaces simplify start-up and wiring complexity
- Address may be set using the bus or an address switch (not for IO-Link)
- Baud rate set via switch
- Status messages retrievable via bus
- Partial safety function for STO (Safe Torque Off)



Dimensions in mm.

Type: Vertical

Nominal Voltage (V DC): 24 (± 10 %)

Nominal Current (A): 3.1

Output Shaft (mm): 14

Output Shaft Type: Hollow

BUS Communication: Can Open (CA); Profi Bus (DP); Device Net (DN); Modbus (MB); IO-Link (IO); ProfiNet (PN); Sercos (SE); EtherCat (EC); Ethernet IP (EI); PowerLink (PL)

Electrical connection: "Standard; with jog keys; 1 connector Y-encoded or 1 connector Y-encoded with jog keys"

Protection Class: IP54; IP65

Motor: EC-motor

Supply Voltage: 24 V DC ± 10 % galvanically separated between control and motor and bus

Measurement System: Absolute, optical-magnetic


Accuracy: ± 0.9°

Intermittence: 25% (basis time 300 s)

Manual Adjustment: Standard


Brake: Optional (holding brake)

Performance Curve - Direct Drives PSE

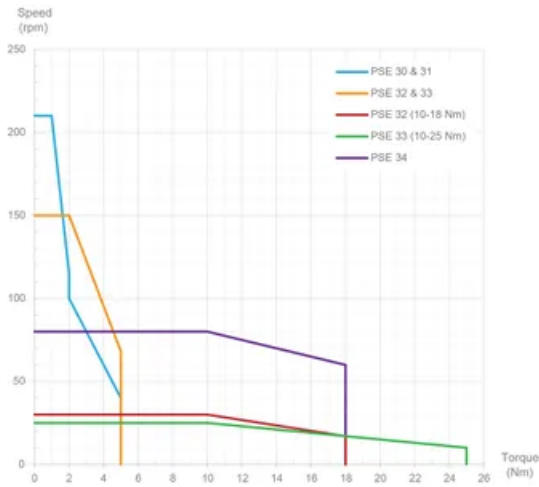


General Data

PSE 332 / 335-14

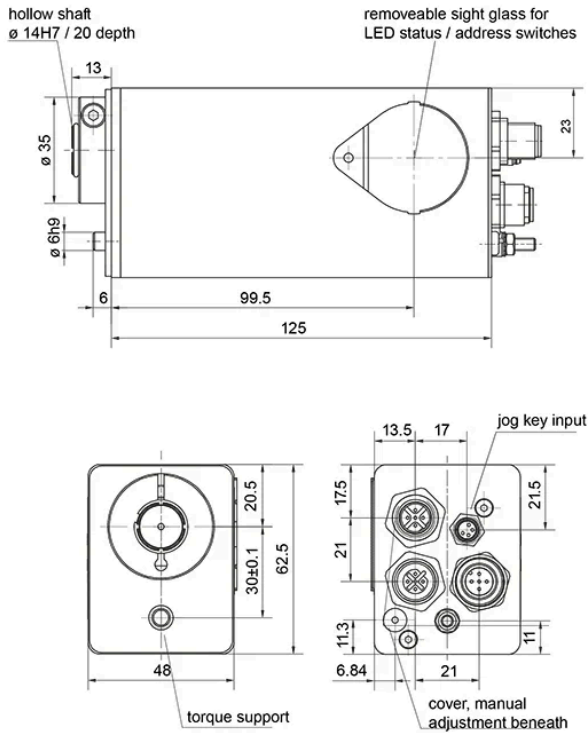

PSE 3310 / 3325-14

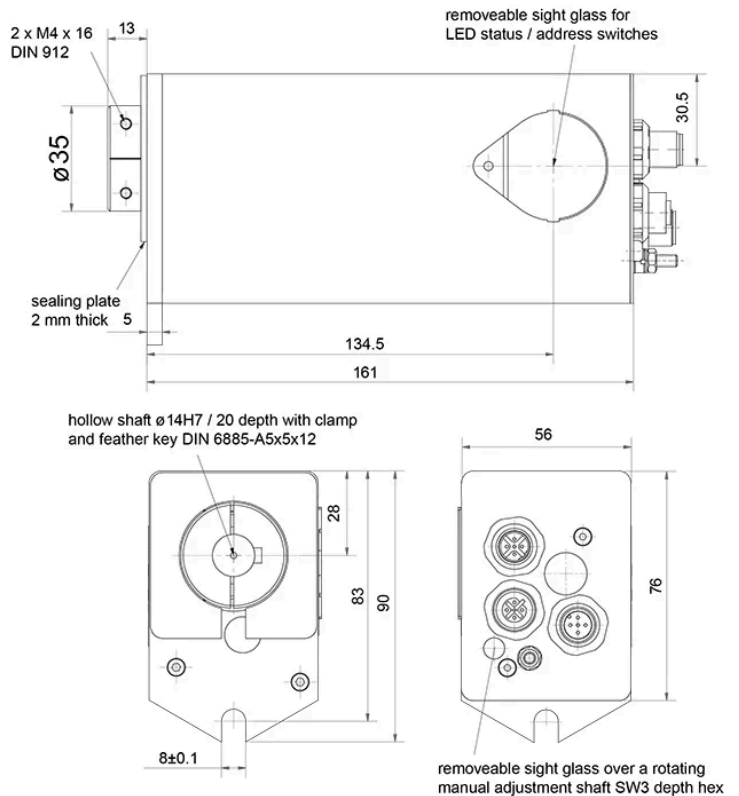

| Designation | Nominal Torque (Nm) | Nominal Speed (rpm) | Nominal Current (A) | Self-holding Torque (Nm) | Positioning Range (rot.) |
|--------------------|---------------------|---------------------|---------------------|--------------------------|--------------------------|
| PSE 332-14 | 2 | 150 | 3.1 | 1 | 250 |
| PSE 335-14 | 5 | 68 | 3.1 | 2.5 | 250 |
| PSE 3310-14 | 10 | 25 | 3.1 | 5 | 250 |
| PSE 3325-14 | 25 | 10 | 3.1 | 12.5 | 250 |