TB80 Multisystem Timing Belt Conveyor





Multisystem with three up to ten synchronised timing belt conveyors. Options such as cleats, false teeth and coated belt. Stand 100% compatible with conveyor available as an option. Inclination or declination of +/- 10° is possible. For dimensions outside our standard range, please contact Rollco.
Note: Please see load/speed diagram for current values. Use our CAD configurator to design your timing belt conveyor according to your preferences and get a visual view, download data sheet and CAD files.

TB40 and TB80 have been extensively tested over its full performance range of speeds, loads, and lengths, together with our standard drive units.
Declaration of incorporation of partly completed machinery according to Directive 2006/42/EC Annex II 1B.
Dimensions in mm.


No. of parallell units: 3 to 10 pcs
Speed (m/min): Up to 54
Drive side: Left/Right
Incline/decline: +/- 10°
Load capacity (kg): Up to 400
Load capacity/m/unit (kg): 100

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

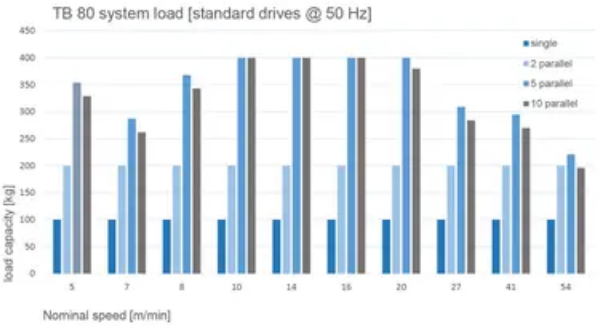

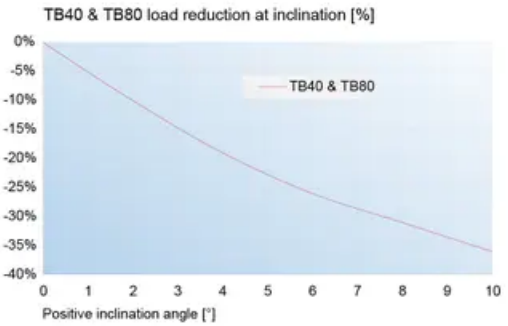

General Data

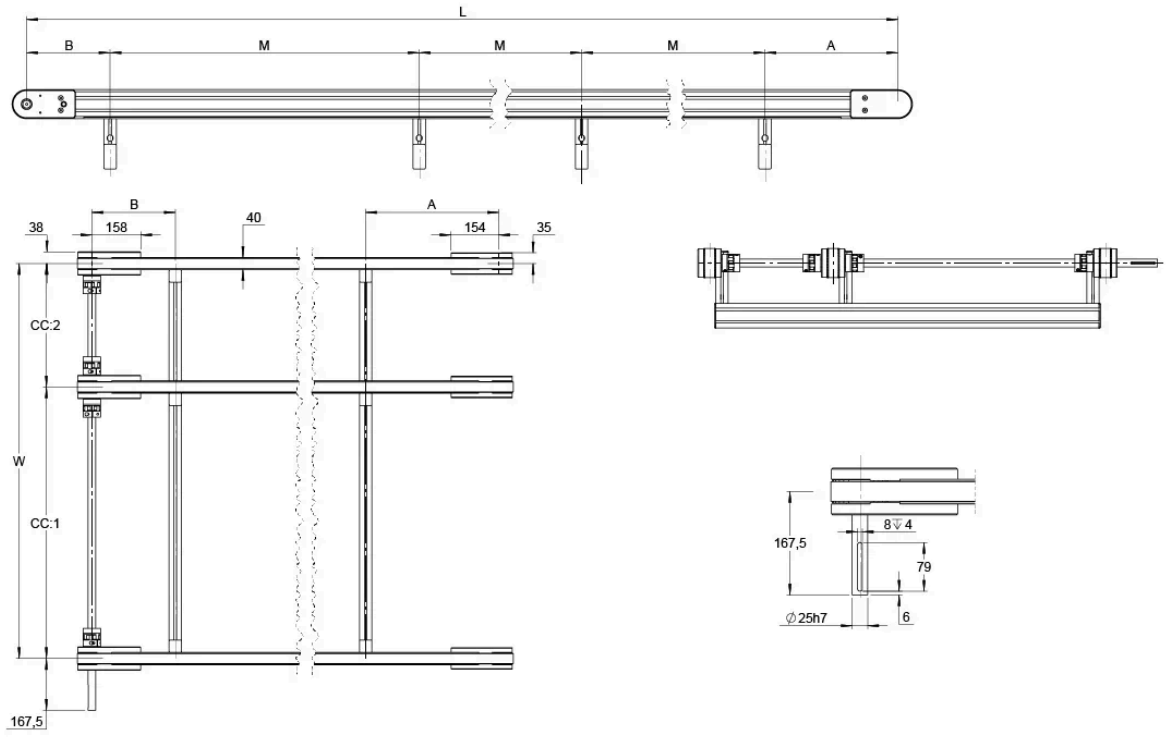

Designation	Profile Width	Profile Height	Belt Width	Total Length (L)	Total Width (W)
TB80-multisystem	40	80	32	max 6000	max 6000

Designation	CC (w)	No. of parallell units	A	B	M
TB80-multisystem	max 2000	3-10	210-500	210-250	160-1200

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.