Standard Fastening Set

Application:
Simple connection that creates an anti-rotation link for two profiles.

Assembly:
Drill Ø7, 20mm from the profile end, in the middle of the slot, through hole.
Thread M8 in the end of the connection profile, 18mm deep.


Supply:
Standard fastener and 1xK6S ISO7380 M8x20.




Material: Zinc plated steel
System: 40 - Slot 8
Type: Fasteners

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Machining:	
Drill hole (a)	Ø 7 mm
Distance (b)	20 mm
Thread (M)	M8
Depth of thread (T)	18 mm



General Data

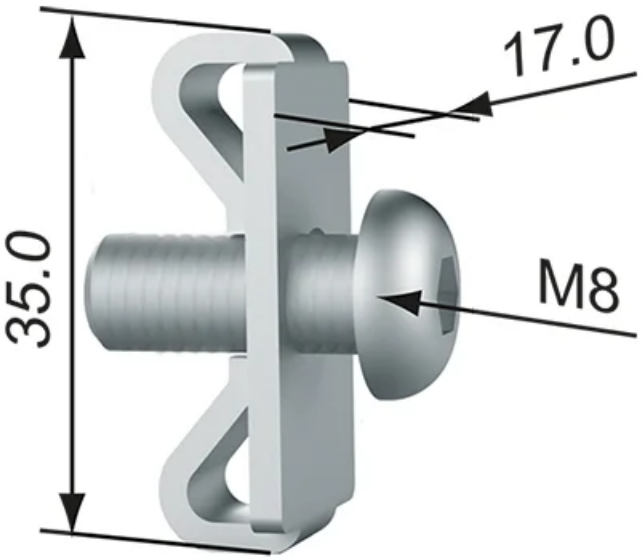

Designation	System	Torque (Nm)	Weight (g)
RF1022	40 - Slot 8	25	35

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.