

## SFYAR

Single Nut with Flange, Over Lead.



All dimensions in mm.



## General Data

| Designation      | Compatible with                  | Dynamic Load Ratings Ca (N) | Static Load Ratings C0a (N) | Ball diameter | Turns x circuits |
|------------------|----------------------------------|-----------------------------|-----------------------------|---------------|------------------|
| <b>SFYAR1632</b> | BKN12 / FKN12 /<br>BFN12 / FFN12 | 4930                        | 11160                       | 2.778         | 0.8 x 2          |
| <b>SFYAR2040</b> | BKN15 / FKN15 /<br>BFN15 / FFN15 | 6530                        | 15970                       | 3.175         | 0.8 x 2          |
| <b>SFYAR2550</b> | BKN20 / FKN20 /<br>BFN20 / FFN20 | 9760                        | 24950                       | 3.969         | 0.8 x 2          |

## Dimensions

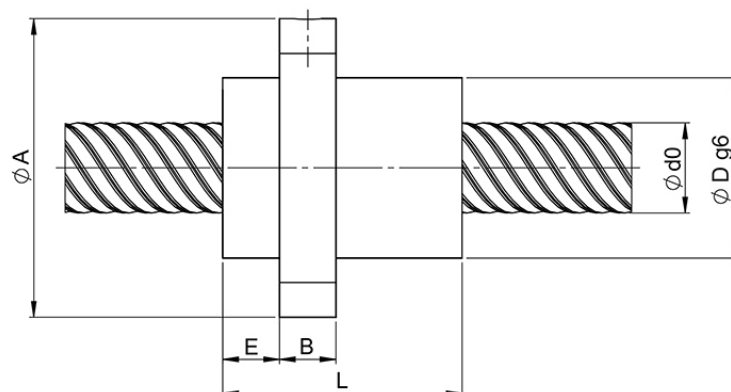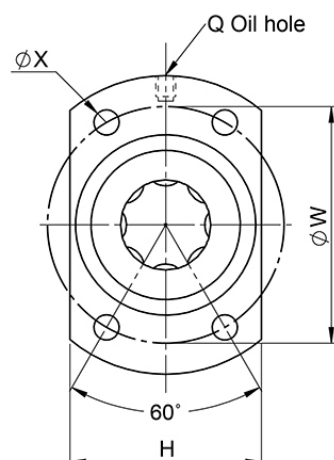

| Designation      | A  | B  | D  | E    | H  | L    | Q  | W  | X   |
|------------------|----|----|----|------|----|------|----|----|-----|
| <b>SFYAR1632</b> | 53 | 10 | 32 | 10.1 | 34 | 42.5 | M6 | 42 | 4.5 |
| <b>SFYAR2040</b> | 62 | 10 | 39 | 13   | 41 | 48   | M6 | 50 | 5.5 |
| <b>SFYAR2550</b> | 74 | 12 | 47 | 15   | 49 | 58   | M6 | 60 | 6.6 |

| Designation      | d0 x Lead |
|------------------|-----------|
| <b>SFYAR1632</b> | 16 x 32   |
| <b>SFYAR2040</b> | 20 x 40   |
| <b>SFYAR2550</b> | 25 x 50   |