

Table of contents

- **3045 - 100% Extension**
- **3080 - 100% Extension**

3045 - 100% Extension

Closed Length ± 0.5 mm

Extension length ± 3 mm

F ± 0.5 mm

Recommended fastening screws ISO 7380 M4 sliding element, ISO7380 M5 bottom element. If use of other fastening screw for bottom element use max size M5 and make sure the head of the screw fits inside the guide.


*Inner rail can be demounted to facilitate assembly or maintenance. It is important that the rail is remounted only on its original telescopic slide.

System Load Capacity value refers to a pair of rails.
All dimensions in mm.

Extension: 100%




General Data

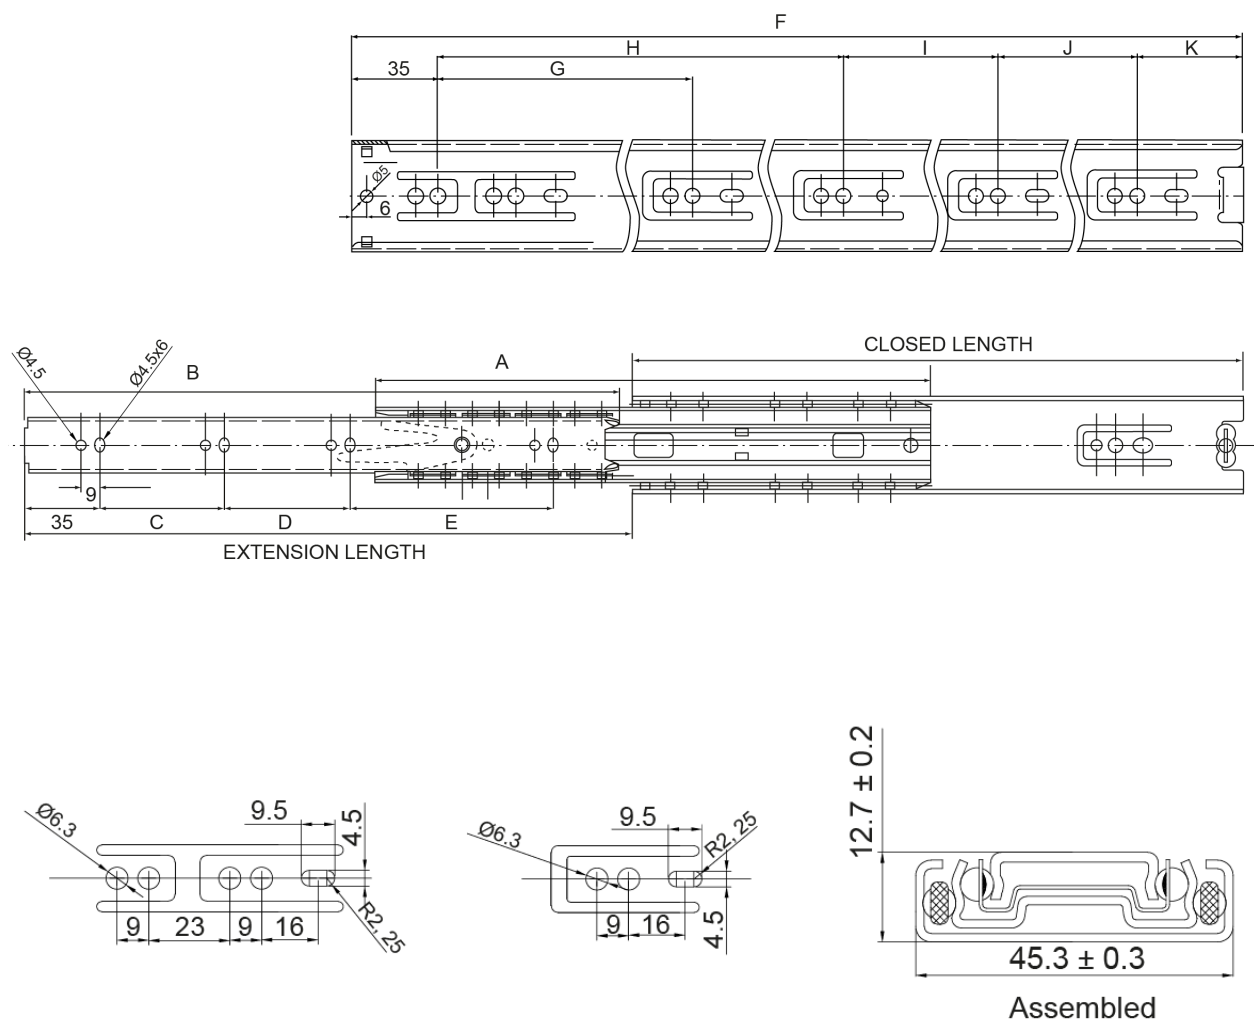

Designation	Closed Length	Extension Length	System Load Capacity (N)
3045-250	250	254	450
3045-300	300	305	450
3045-350	350	356	450
3045-400	400	406	450
3045-450	450	457	450
3045-500	500	508	400
3045-550	550	558	360
3045-600	600	609	320
3045-650	650	660	290
3045-700	700	711	260

Dimensions

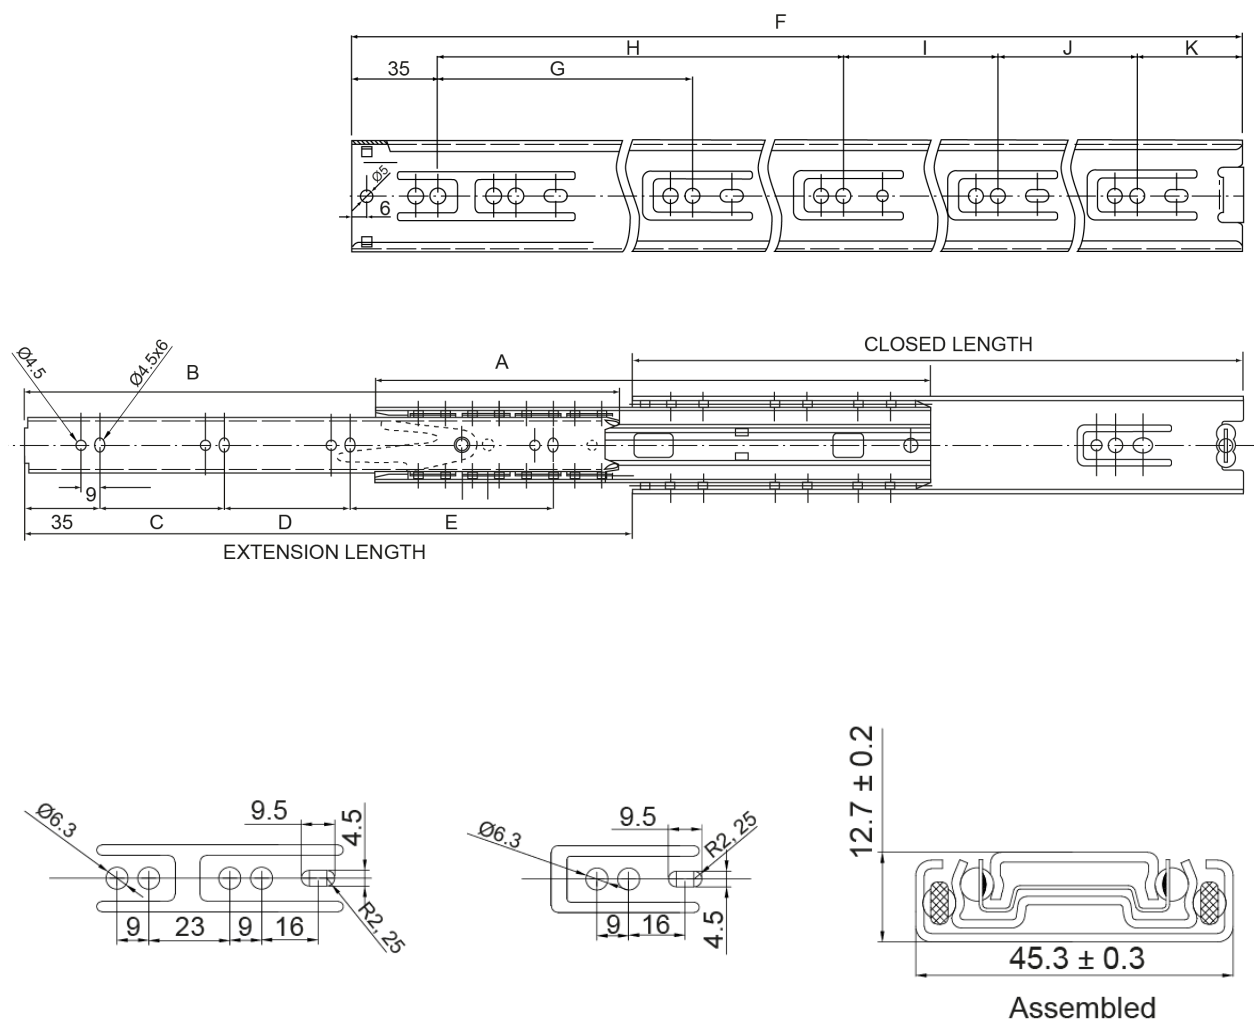

Designation	A	B	C	D	E	F	G	H	I
3045-250	234	248	96	96	-	250	160	-	-
3045-300	284	297	96	128	-	300	128	192	-
3045-350	334	347	96	64	96	350	128	224	-
3045-400	384	398	96	64	128	400	128	224	96
3045-450	434	448	96	96	160	450	128	224	128
3045-500	484	498	96	96	192	500	128	224	128
3045-550	534	547	96	128	224	550	128	224	128
3045-600	584	597	96	160	224	600	128	224	128
3045-650	634	647	96	160	256	650	128	224	128
3045-700	684	697	96	192	256	700	128	224	128

Dimensions

Designation	J	K
3045-250	-	55
3045-300	-	73
3045-350	-	91
3045-400	-	45
3045-450	-	63
3045-500	64	49
3045-550	96	67
3045-600	128	85
3045-650	192	71
3045-700	224	89

3080 - 100% Extension


All dimensions in mm.

System Load Capacity value refers to a pair of rails.

Extension: 100%




General Data

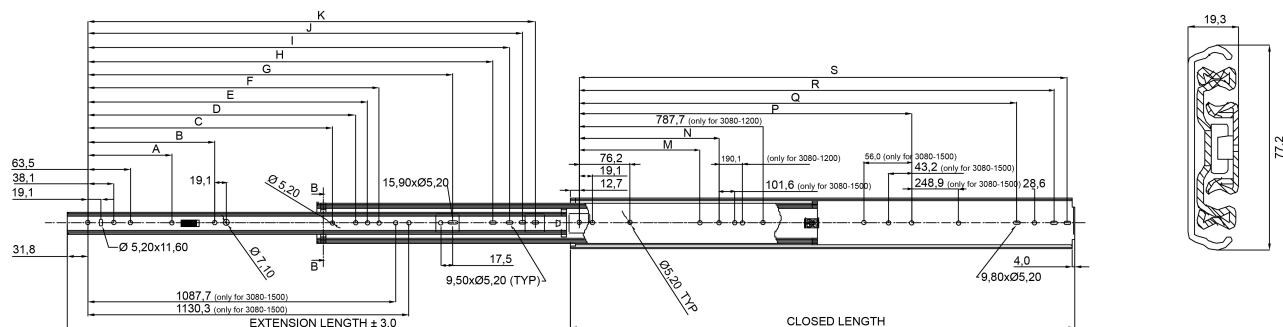

Designation	Closed Length	Extension Length	System Load Capacity (N)
3080-300	304	304	1780
3080-400	406	406	1780
3080-500	508	508	1780
3080-600	609	609	1690
3080-700	711	711	1600
3080-800	812	812	1510
3080-900	914	914	1420
3080-1000	1016	1016	1330
3080-1100	1117	1117	1240
3080-1200	1219	1219	1150
3080-1300	1320	1320	1060
3080-1400	1422	1422	1020
3080-1500	1524	1524	890

Dimensions

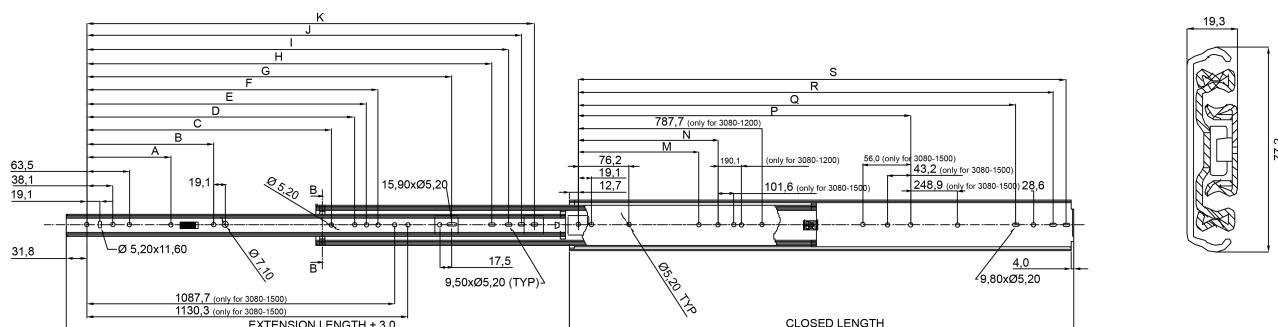

Designation	A	B	C	D	E	F	G	H	I
3080-300	-	-	-	-	-	-	-	154	179.4
3080-400	127	-	-	-	-	-	-	255.6	281
3080-500	127	190.5	-	-	-	-	296.9	357.2	382.6
3080-600	127	190.5	-	-	-	-	398.5	458.8	484.2
3080-700	127	190.5	-	-	-	-	500.1	560.4	585.8
3080-800	127	190.5	368.3	-	-	-	601.7	662	687.4
3080-900	127	190.5	368.3	520.7	-	-	703.3	763.6	789
3080-1000	127	190.5	368.3	622.3	-	-	804.9	865.2	890.6
3080-1100	127	190.5	368.3	723.9	-	825.5	906.5	966.8	992.2
3080-1200	127	190.5	368.3	723.9	763.7	825.5	1004.7	1068.4	1093.8
3080-1300	127	190.5	368.3	774.7	-	825.5	1109.7	1170	1195.4
3080-1400	127	190.5	368.3	774.7	-	825.5	1211.3	1271.6	1297
3080-1500	127	190.5	368.3	622.3	774.7	825.5	1309.5	1373.2	1398.6

Designation	J	K	M	N	P	Q	R	S
3080-300	198.4	217.4	-	-	-	203.2	260.4	279.4
3080-400	299.9	319	-	-	-	304.8	361.9	381
3080-500	401.6	420.6	-	-	-	406.4	463.6	482.6
3080-600	503.2	522.2	-	-	-	508	565.2	584.2
3080-700	604.8	623.8	-	-	-	609.6	666.8	685.8
3080-800	706.4	725.4	234.9	393.7	552.5	711.2	768.4	787.4
3080-900	807.9	827	234.9	444.5	654.1	812.8	870	889
3080-1000	909.6	928.6	234.9	495.3	755.7	914.4	971.6	990.8
3080-1100	1011.2	1030.2	234.9	546.1	857.3	1016	1073.2	1092.2
3080-1200	1112.8	1131.8	234.9	406.8	958.8	1117.6	1174.8	1193.8
3080-1300	1214.4	1233.4	234.9	596.9	958.8	1219.2	1276.4	1295.4
3080-1400	1316	1335	234.9	596.9	958.8	1320.8	1378	1397
3080-1500	1417.6	1436.6	234.9	495.3	1014.8	1422.4	1479.6	1498.6