

## T-Nuts, ball-type, slide-in


### Application:

Slides in the t-slot from the end of the profile and is held in position by a spring-loaded ball. The wide supporting surface of the t-nut makes it suitable for higher fastening forces. (SV2003V is machined after threading.)

**Material:** Steel, zinc-plated

**System:** 40 - Slot 8

**Type:** T-nuts

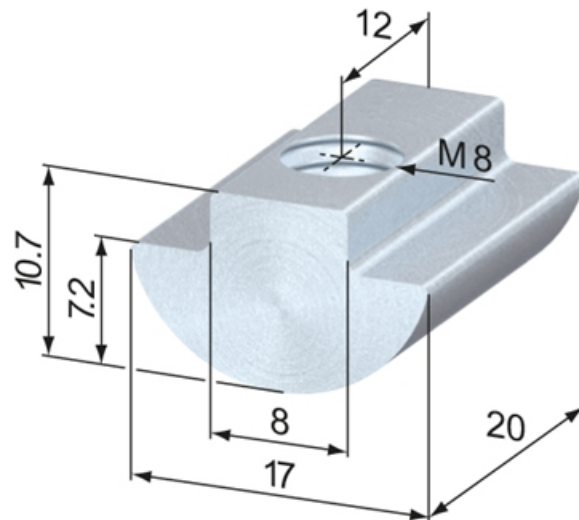

T-Nuts, slide-in



T-Nuts, push-in



### T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor (S > 2) against plastic deformation.

Profile type	Max. pull charge F
standard	5000 N
double br.	3250 N
semi	2500 N
light	2000 N
superlight	1750 N



## General Data

Designation	System	Thread	Weight (g)
SV2000V	40 - Slot 8	M5	17
SV2001V	40 - Slot 8	M6	17
SV2002V	40 - Slot 8	M8	15
SV2003V	40 - Slot 8	M8 S	14