


## T-Nut Profile, push-in

Application:

For manufacturing t-nuts, maximum tapping size M8.

**System:** 40 - Slot 8

**Type:** T-nuts

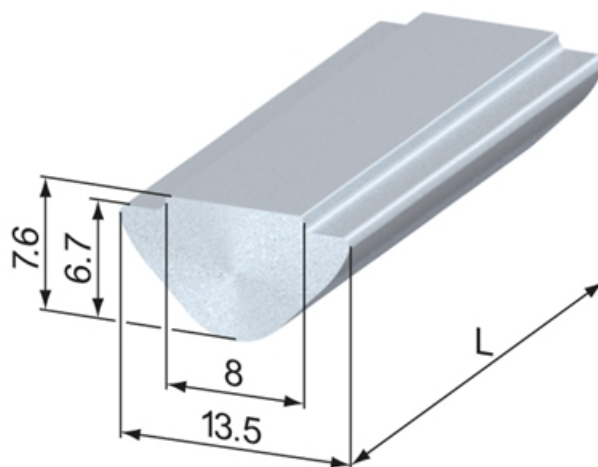

T-Nuts, slide-in



T-Nuts, push-in



### T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor ( $S > 2$ ) against plastic deformation.

| Profile type | Max. pull charge F |
|--------------|--------------------|
| standard     | 5000 N             |
| double br.   | 3250 N             |
| semi         | 2500 N             |
| light        | 2000 N             |
| superlight   | 1750 N             |



## General Data

| Designation | System      | Material           | Weight (g) | Length |
|-------------|-------------|--------------------|------------|--------|
| SV2560V     | 40 - Slot 8 | Steel, zinc-plated | 1605       | 3000   |
| SV2575V     | 40 - Slot 8 | Stainless steel    | 1605       | 3000   |