Conveyor Stand TB80 Double

Aluminium profile stand to match Rollco Timing belt convyeors. Available with adjustable fixable feet. Configure your stand together with the timing belt conveyor in our CAD-configurator.

Values shown under “General data” indicates min and max values in mm according to our standard configurations. For other designs, please contact Rollco.

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Stand TB80 Double Timing Belt Conveyor

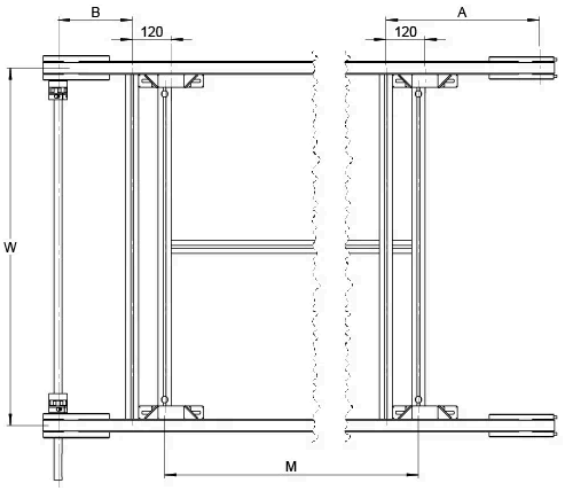

Stand TB80 Double Timing Belt Conveyor
450 ≤ E,D ≤ 500

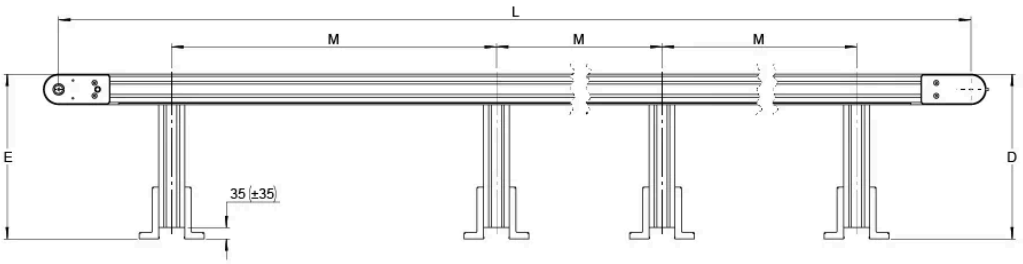

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Stand TB80 Double Timing Belt Conveyor
500 < E,D ≤ 1200

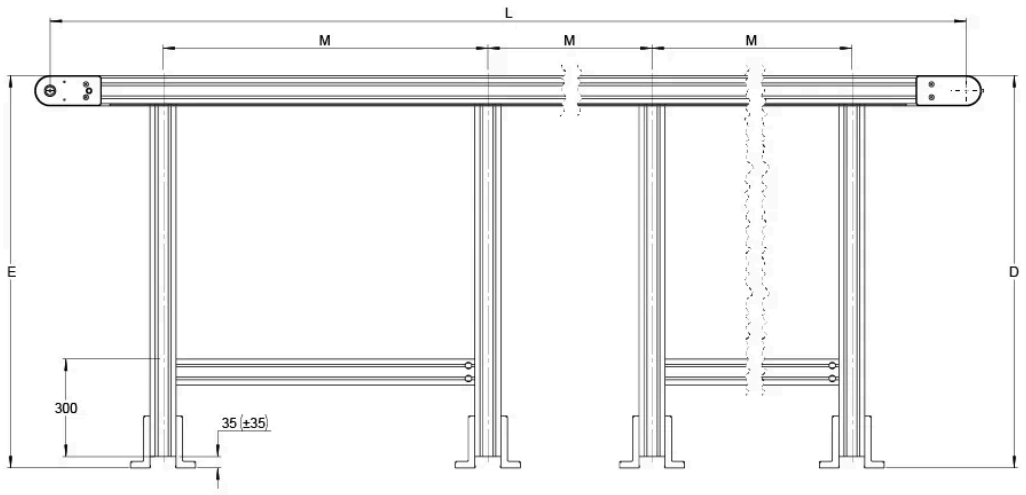

Stand TB80 Double Timing Belt Conveyor

900 < E,D ≤ 1200

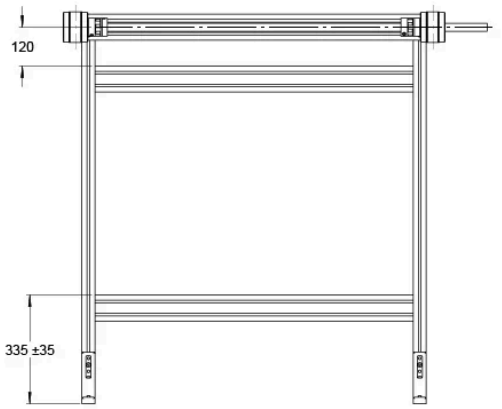

500 < E,D ≤ 900

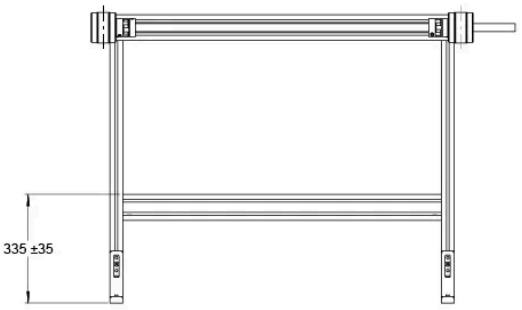

Designation	Profile Width	Profile Height	Total Length (L)	Total Width (W)	CC (w)
TB80-double-stand	40	80	max 6000	max 2000	max 2000

Designation	No. of parallell units	A	B	D	E	M
TB80-double-stand	2	360-670	180-280	450-1200	450-1200	240-1200

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.