

Lifting Castor Units


Application:

For relocating measurement devices and jigs.


Material: Aluminum, black anodized

System: 40 - Slot 8

Type: Castors

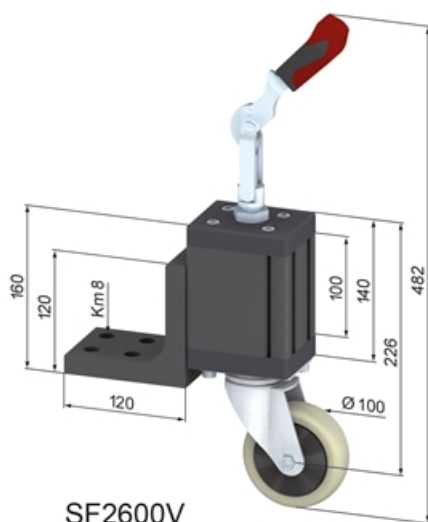

SF2600V

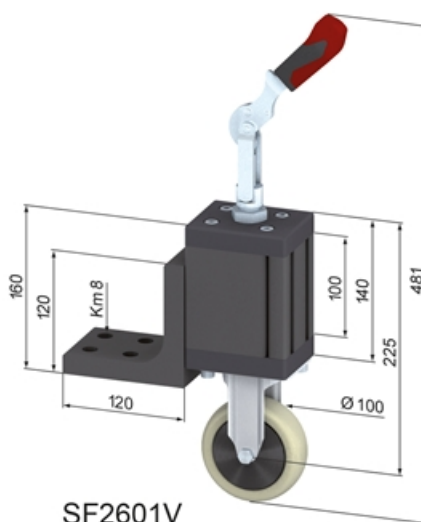

SF2601V

General Data

Designation	Description	System	Diameter	Max. Load (kg)
SF2600V	LCU, with steering roller Ø 100	40 - Slot 8	100	110
SF2601V	LCU, with trestle roller Ø 100	40 - Slot 8	100	100
SF2604V	LCU, with steering roller Ø 125	40 - Slot 8	125	110
SF2605V	LCU, with trestle roller Ø 125	40 - Slot 8	125	100
SF2606V	LCU, with steering roller Ø 100, compact	40 - Slot 8	100	110
SF2607V	LCU, with trestle roller Ø 100, compact	40 - Slot 8	100	100