

Swivel Castors, Bolt Hole with Lock

Housing made of Polyamide, precision ball bearing in swivel head, bolt hole.

Wheel centre made of Polyamide.

Tread made of Polyurethane, precision ball bearing.

Standard: EN 12530

Hardness of tread: Shore A 92

Material: Polyamide



System: 40 - Slot 8; 30 - Slot 6; 20 - Slot 5

Temperature range (°C): -10° to +40°

Type: Castors





PZ1543

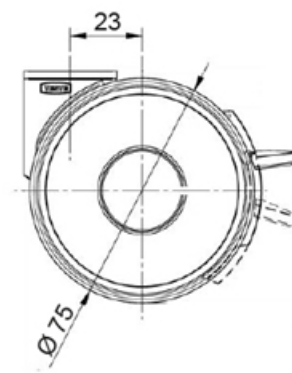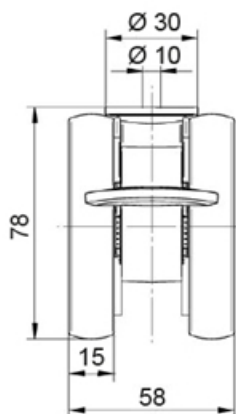

PZ1543



PZ1540

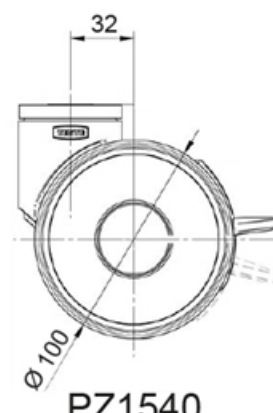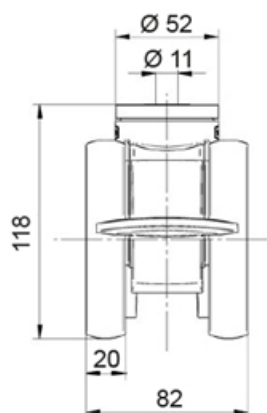


PZ1540

Swivel Castors, Bolt Hole with Lock



PZ1544

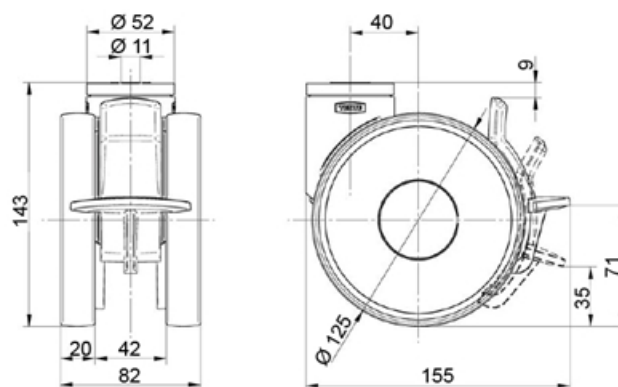

PZ1544

General Data

| Designation | Description | Colour | Weight (g) | Swivel Interference (mm) | Load Capacity (kg) |
|---------------|---|---------|------------|--------------------------|--------------------|
| PZ1543 | Swivel castor with wheel brake, bolt hole | RAL7001 | 237 | 156 | 90 |
| PZ1540 | Swivel castor with total lock, bolt hole | RAL9002 | 750 | 216 | 100 |
| PZ1544 | Swivel castor with total lock, kick pedal | RAL9002 | 743 | 258 | 110 |

| Designation | Static Load Capacity (kg) |
|---------------|---------------------------|
| PZ1543 | 180 |
| PZ1540 | 200 |
| PZ1544 | 220 |