

## System Glider 40

### Application:

Linear guidance of one profile against another. Used for sliding doors or windows. The fixable system glider are locked into the profile t-slot via M4 grub screws.


### Supplied length:

Max. 2950 mm


**Material:** POM, black

**System:** 40 - Slot 8


**Type:** System Gliders and Rollers

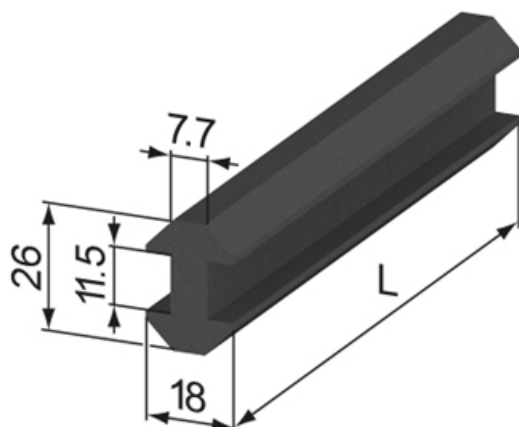


SZ1330S

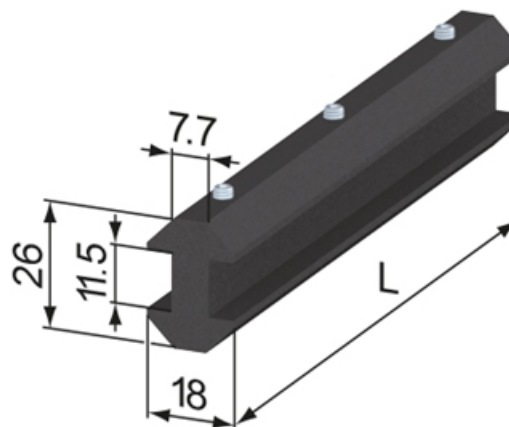

SZ1333S

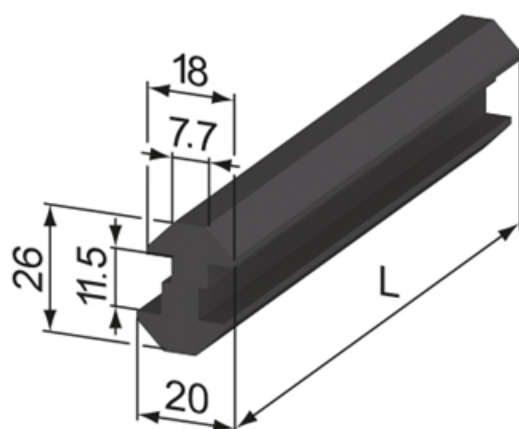

SZ1335S

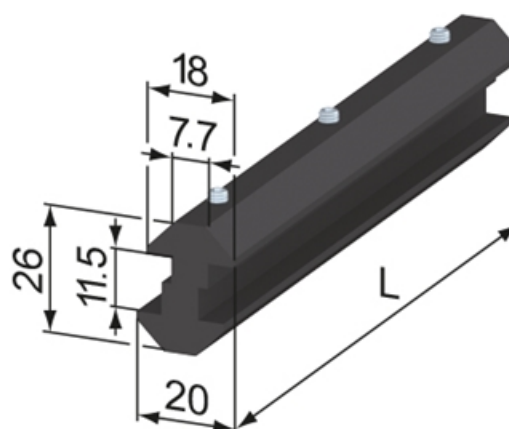

SZ1338S

## General Data

Designation	Description	System
<b>SZ1330S</b>	System Glider 40	40 - Slot 8
<b>SZ1333S</b>	System Glider 40, fixable	40 - Slot 8
<b>SZ1335S</b>	System Glider 40, offset	40 - Slot 8
<b>SZ1338S</b>	System Glider 40, offset, fixable	40 - Slot 8