Knuckle Foot D40

Swiveling and leveling knuckle feet for stable placement on uneven floors. Consists of threaded rod and base of plastic (PA) with anti-slip plate, without bolt-down holes.

Material: Base in plastic PA, threaded rod in steel.
Max. Load (kg): 350
System: 40 - Slot 8; 30 - Slot 8; 30 - Slot 6; 20 - Slot 5
Type: Feet

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

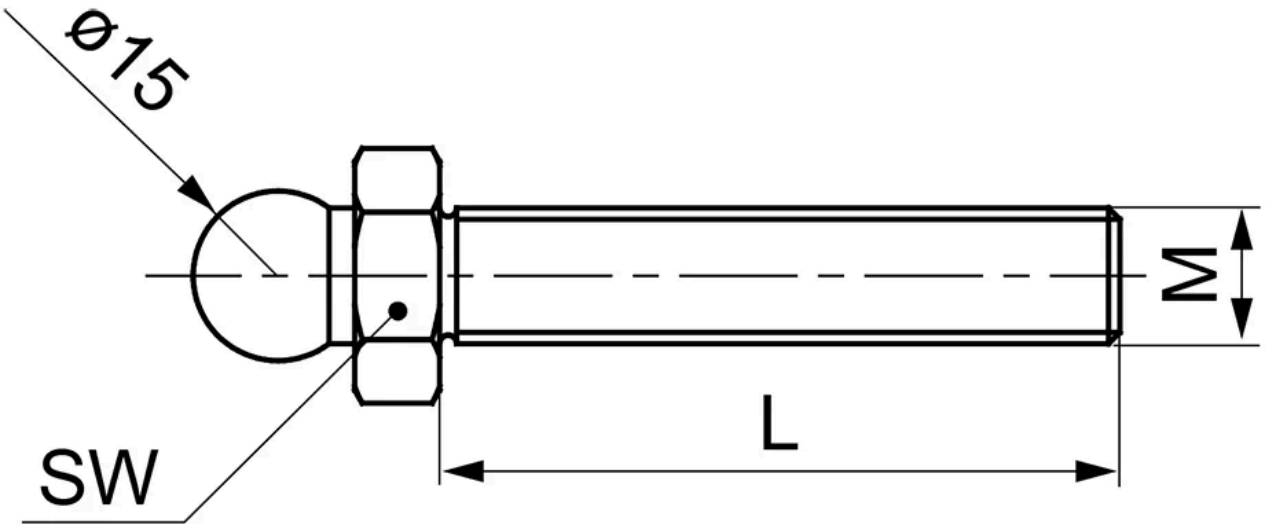

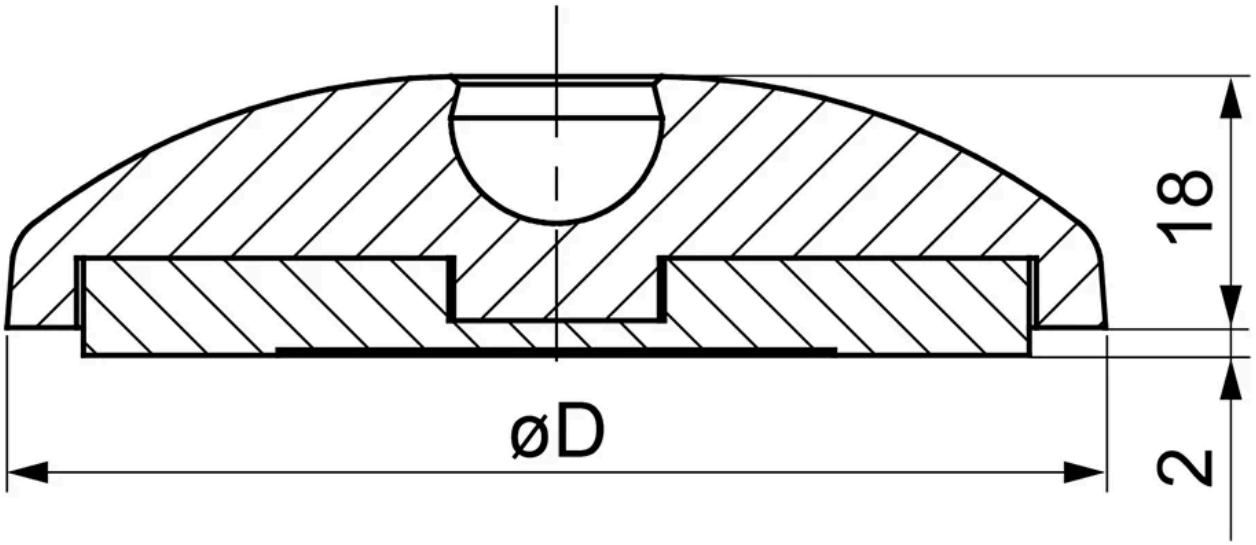

Designation	D	L	M	Weight (g)	Max. Load (kg)
RA1366	39	40	M8	53	350
RA1367	39	80	M8	66	350

Designation	SW (mm)
RA1366	14
RA1367	14

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.