

Polyamide Light Roller PAS ---.0360

- Polyamide roller combined – fixed with oilamide sliding block
- Lubricated for lifetime
- High abrasion resistance
- Low friction
- High chemical resistance to alcohol, salts, greases and certain acids and alkalis in diluted concentration.

Reduction of value by speed of:

- 1 m/sec: 0%
- 2 m/sec: -20%
- 3 m/sec: -30%



Use profile UP---.0730. See Fixing element rectangular and square.

Order example: Roller + fixing plate PAS040.0360/BQ 1000
 Roller Ø 40 mm - welded with mounting element 50 mm x 50 mm x 8 mm

Dimensions in mm.

Temperature: Maximum working temperature 80° C.


Speed: Travel speed up to 5 m/sec

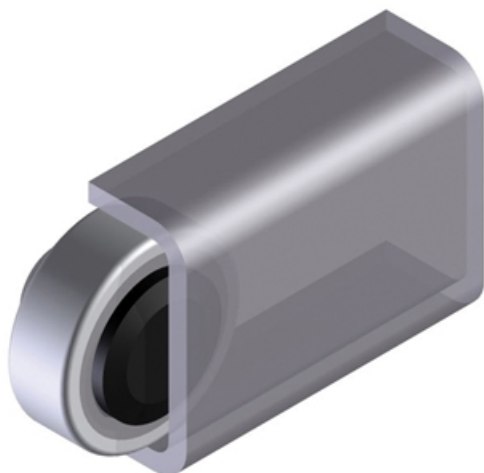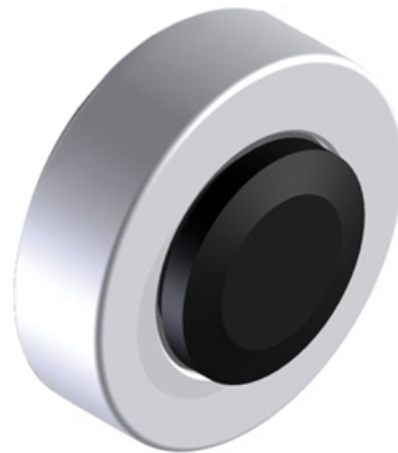

Variant Data

Designation	System Load Capacity Radial	System Load Capacity Axial
PAS040.0360	900 N	400 N
PAS050.0360	1200 N	400 N
PAS060.0360	1500 N	600 N
PAS100.0360	2500 N	600 N

Variant Measurements

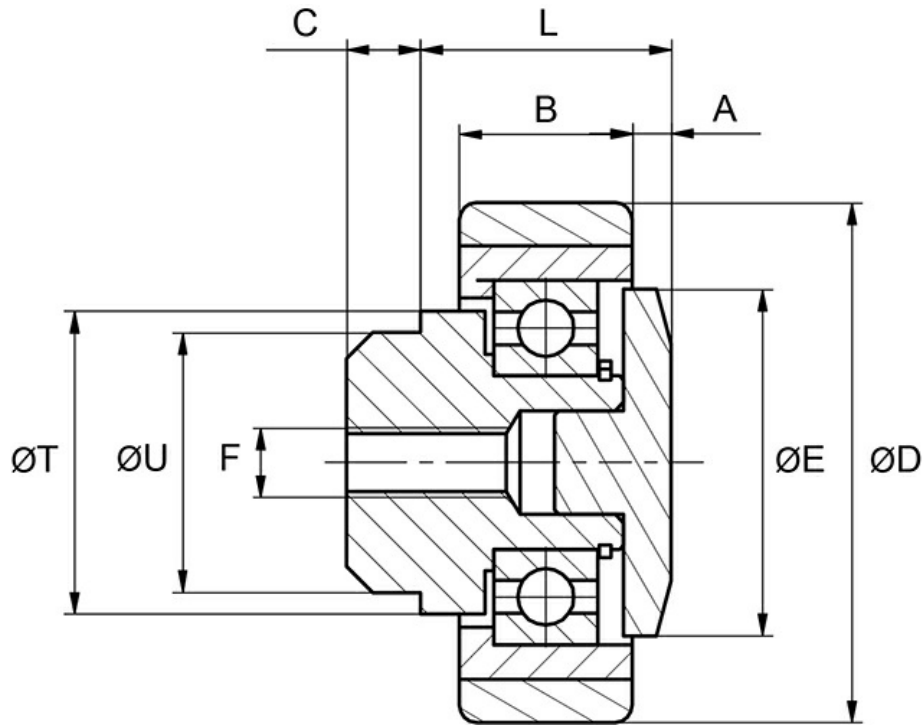

Designation	A	B	C	D	E	F	L	T	U
PAS040.0360	2,80	15	2,80	40	20	M6	24	25	20
PAS050.0360	5	15	5	52,50	31	M8	27	35	35
PAS060.0360	4,50	18	8,50	62,50	40	M8	29	35	30
PAS100.0360	6,30	25	8	101,20	64	—	41	50	45