

Polyamide Light Roller PAS ---.0200

- Polyamide roller combined – fixed
- Lubricated for lifetime
- High abrasion resistance
- Low friction
- High chemical resistance to alcohol, salts, greases and certain acids and alkalis in diluted concentration.

Reduction of value by speed of:

- 1 m/sec: 0%
- 2 m/sec: -20%
- 3 m/sec: -30%



Use profile UP---.0730. See Fixing element rectangular and square.

Order example: Roller + fixing plate PAS040.0360/BQ1000
 Roller Ø 40 mm - welded with mounting element 50 mm x 50 mm x 8 mm

Dimensions in mm.

Temperature: Maximum working temperature 80° C


Speed: Travel speed up to 5 m/sec

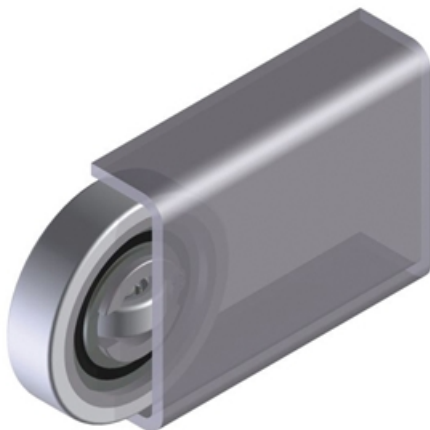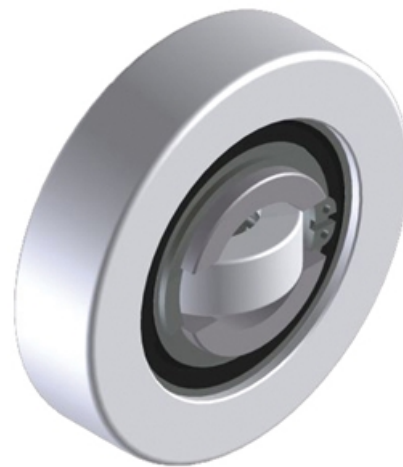

Variant Data

Designation	System Load Capacity Radial	System Load Capacity Axial
PAS100.0200	2500 N	900 N
PAS125.0200	6000 N	1300 N

Variant Measurements

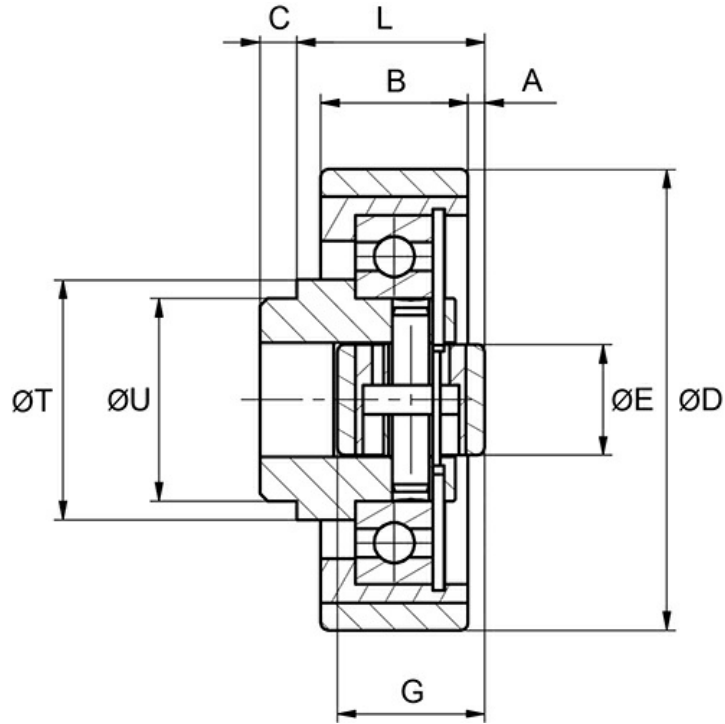

Designation	A	B	C	D	E	G	L	T	U
PAS100.0200	6,50	25	8	101,20	15	40	41	51	45
PAS125.0200	4,50	40	10	125	30	40	51	65	55