


220 (Right) & 230 (Left) Lock in / Lock out - 100% Extension

Note 1: 15 mm dia. holes in centre allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

All dimensions in mm. Please contact us for CAD-files.

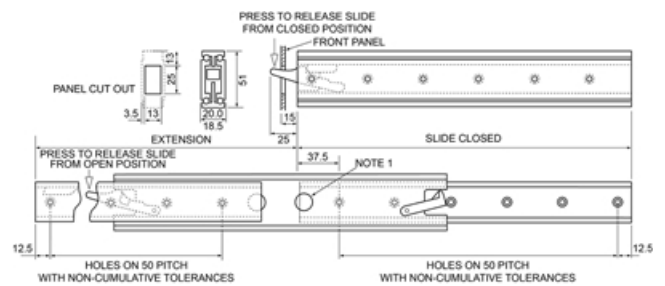

Variant Data

Designation	Closed Length	Extension Length	Load / Pair	Number of Fixing Holes	Remark
220-300	300,00	330,00	550 N	6	Right
220-350	350,00	380,00	620 N	7	Right
220-400	400,00	430,00	710 N	8	Right
220-450	450,00	480,00	780 N	9	Right
220-500	500,00	530,00	840 N	10	Right
220-550	550,00	580,00	880 N	11	Right
220-600	600,00	630,00	900 N	12	Right
230-300	300,00	330,00	550 N	6	Left
230-350	350,00	380,00	620 N	7	Left
230-400	400,00	430,00	710 N	8	Left
230-450	450,00	480,00	780 N	9	Left
230-500	500,00	530,00	840 N	10	Left
230-550	550,00	580,00	880 N	11	Left
230-600	600,00	630,00	900 N	12	Left