## ROLLCO LINEAR SOLUTIONS YOUR WAY

## **Motors for BF40**

This is a selection of standard motors available for our BF40 series.


We can customise the drive shaft to accommodate many different motors and gear choices. Please contact Rollco for more information.

Dimensions in mm.

## NOTE!

Other motors and frequency converters are available on request. Individual motors are not tested. Motors and gears are not assembled to the unit.




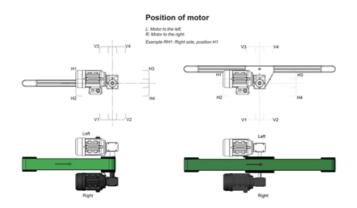



Rollco A/S • Skomagervej 13 E • 7100 Vejle • Danmark Tel. +45 75 52 26 66 • info@rollco.dk • CVR-nr. 26919010

Page 1 of 2 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

## **General Data**





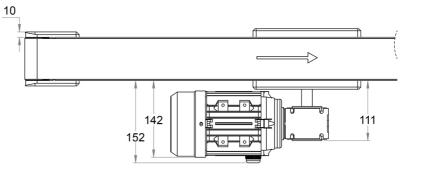

Designation	Voltage (V)	Power (kW)	Frequency (Hz)	Current (A)	Speed (rpm)
MS63A-4	230/400	0.12	50	0.82 / 0.47	1350
MS63B-4	230/400	0.18	50	1.18 / 0.68	1350
MS63C-4	230/400	0.25	50	1.58 / 0.91	1340
ML63B-4	230/400	0.18	50	1.36	1340

Designation	Protection Class	Phase	Code
MS63A-4	IP55	3	1
MS63B-4	IP55	3	2
MS63C-4	IP55	3	3
ML63B-4	IP55	1	4

Rollco A/S • Skomagervej 13 E • 7100 Vejle • Danmark Tel. +45 75 52 26 66 • info@rollco.dk • CVR-nr. 26919010