

UP---.0730

- Low weight
- Suitable for highly dynamic applications
- Easy to weld
- Special machining on request
- High manufacturing accuracy

Ordering example: UP 050.0730 - 2800
U-Profile with inside measurement 53 mm, length 2800 mm

Dimensions in mm.

Material: S235J2


Sizes Available: 40; 50; 60; 100; 125; 145; 160; 180



General Data

| Designation | Weight (kg/m) |
|-------------|---------------|
| UP040.0730 | 2.62 |
| UP050.0730 | 5.30 |
| UP060.0730 | 5.80 |
| UP100.0730 | 8.30 |
| UP125.0730 | 14.30 |
| UP145.0730 | 16.90 |
| UP160.0730 | 18.41 |
| UP180.0730 | 24.10 |

Dimensions

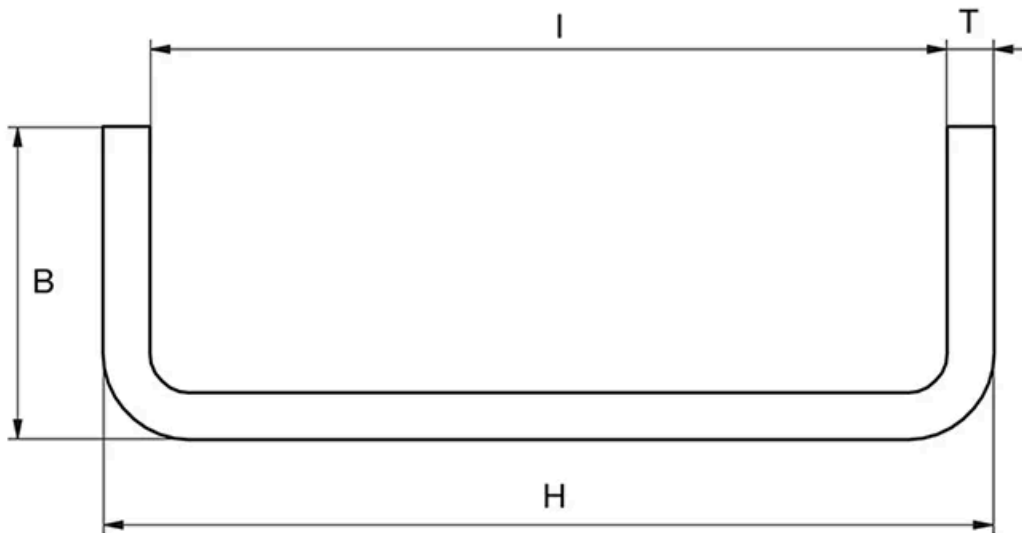

| Designation | B | H | I | T |
|-------------|----|------|------|----|
| UP040.0730 | 24 | 48.5 | 40.5 | 4 |
| UP050.0730 | 30 | 65 | 53 | 6 |
| UP060.0730 | 33 | 75 | 63 | 6 |
| UP100.0730 | 40 | 114 | 102 | 6 |
| UP125.0730 | 56 | 142 | 126 | 8 |
| UP145.0730 | 65 | 162 | 146 | 8 |
| UP160.0730 | 73 | 175 | 159 | 8 |
| UP180.0730 | 70 | 200 | 180 | 10 |